


聚氯乙烯無護套電纜 (單枝單膠)

PVC INSULATED NON-SHEATHED CABLES (SINGLE-CORE)

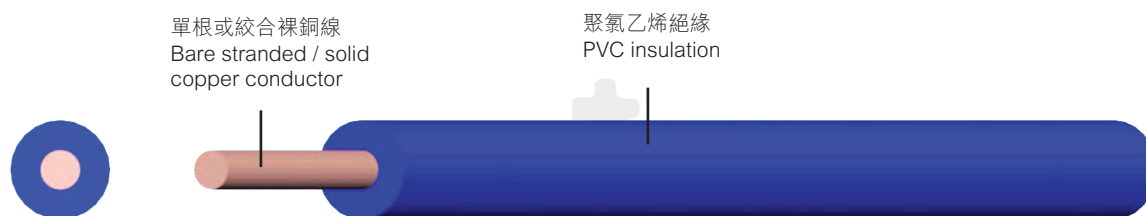

ROYAL HORSE	60227IEC05	300/500V	N.Nmm ²	PVC CABLE	GB/T 5023	KEMA-KEUR	CCC A007306
				or			
ROYAL HORSE	60227IEC01	450/750V	N.Nmm ²	PVC CABLE	GB/T 5023	KEMA-KEUR	CCC A007306
				or			
	GB/T5023	60227 IEC05	N.Nmm ²	PVC CABLE	300/500V	R.H. (MODEL 9/9.9)	
				or			
	GB/T5023	60227 IEC01	N.Nmm ²	PVC CABLE	450/750V	R.H. (MODEL 9/9.9)	

說明

- 工作溫度: 70°C
- 額定電壓: 300/500V、450/750V
- 標準: GB/T5023.1、IEC60227
- 型號: 227IEC01 & 05 (BV)
- 導體使用單根或絞合裸銅線
- 阻燃聚氯乙烯絕緣

DESCRIPTION

- Rated temperature: 70°C
- Rated voltage: 300/500V, 450/750V
- Reference standard: GB/T5023.1, IEC60227
- Model: 227IEC01 & 05 (BV)
- Bare stranded or solid copper conductor
- Flame retardant colour-coded PVC insulation

應用

- 固定布線
- 可用於室內明敷、穿管等場合

APPLICATION

- For fixed wiring
- Can be placed into trunk and conduit

聚氯乙稀無護套電纜 (單枝單膠)

PVC INSULATED NON-SHEATHED CABLES (SINGLE-CORE)

截面 Cross-sectional Area (mm ²)	導體結構 No. & diameter of wire (N/mm)	參考外徑 Reference overall diameter (mm)	參考重量 Reference weight (kg/km)	最小絕緣電阻 Insulation Resistance (MΩ · km) 70°C Min
60227IEC05 (BV) 300/500V				
0.5	1/0.8	2.1	9	0.015
0.75	1/0.98	2.5	13	0.012
1.0	1/1.13	2.6	16	0.011
60227IEC01 (BV) 450/750V				
1.5	1/1.38	2.9	21	0.011
1.5	7/0.52	3.1	23	0.010
2.5	1/1.78	3.5	33	0.010
2.5	7/0.67	3.7	35	0.009
4.0	1/2.25	4.0	49	0.0085
4.0	7/0.85	4.3	52	0.0077
6.0	1/2.76	4.6	69	0.0070
6.0	7/1.04	4.9	73	0.0065
10	7/1.35	6.2	120	0.0065
16	7/1.70	7.3	183	0.0050
25	7/2.14	9.0	284	0.0050
35	19/1.53	10.5	385	0.0040
50	19/1.78	12.0	514	0.0045
70	19/2.14	13.7	719	0.0035
95	19/2.52	16.0	993	0.0035
120	37/2.03	17.6	1233	0.0032
150	37/2.25	19.6	1519	0.0032
185	37/2.52	22.0	1906	0.0032
240	61/2.25	25.0	2483	0.0032
300	61/2.52	27.8	3107	0.0030
400	91/2.36	31.5	4045	0.0028