


聚氯乙烯絕緣絞型連接軟電線 (紅黑對絞線)

PVC INSULATED FLEXIBLE WIRE (RED/BLACK TWISTED WIRE)

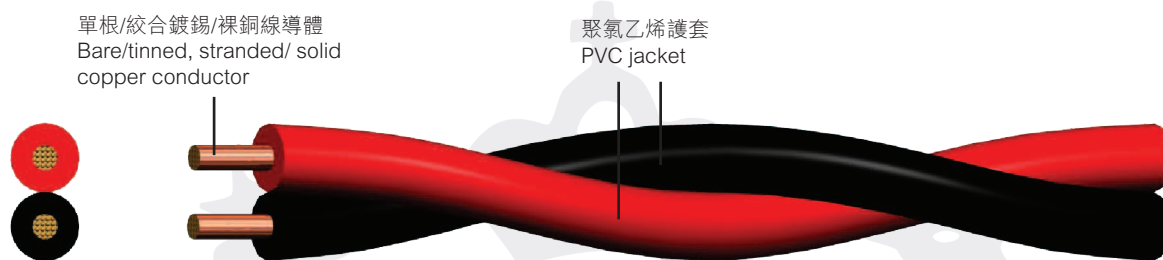

說明

- 工作溫度: 70°C
- 額定電壓: 300/300V
- 標準: JB/T8734.3
- 型號: RVS
- 導體使用單根或絞合鍍錫或裸銅線
- 紅/黑聚氯乙烯或阻燃聚氯乙烯絕緣

DESCRIPTION

- Rated temperature: 70°C
- Rated voltage: 300/300V
- Reference standard: JB/T8734.3
- Model: RVS
- Bare or tinned, stranded or solid copper conductor
- PVC or colour-coded flame retardant PVC insulation

應用

- 中輕型移動電器、儀器儀表、家用電器、動力照明等使用時要求柔軟的場合

APPLICATION

- For light or medium size home appliances, instrument & meters, and power-driven lighting

聚氯乙稀絕緣絞型連接軟電線 (紅黑對絞線)**PVC INSULATED FLEXIBLE WIRE****(RED/BLACK TWISTED WIRE)**

截面 Cross-sectional Area (mm ²)	導體結構 No. & diameter of wire (N/mm)	參考外徑 Reference overall diameter (mm)	參考重量 Reference weight (kg/km)	20°C時最大電阻 Ω/km Resistance at 20°C Max	
				銅芯 Copper core	鍍錫銅芯 Tin plated copper core
2 X 0.5	44/0.12	6.0	24	39	40.1
2 X 0.75	66/0.12	6.2	31	26	26.7

