


聚氯乙烯絕緣護套屏蔽軟電纜

PVC INSULATED AND PVC SHEATHED SHIELDED FLEXIBLE CABLES

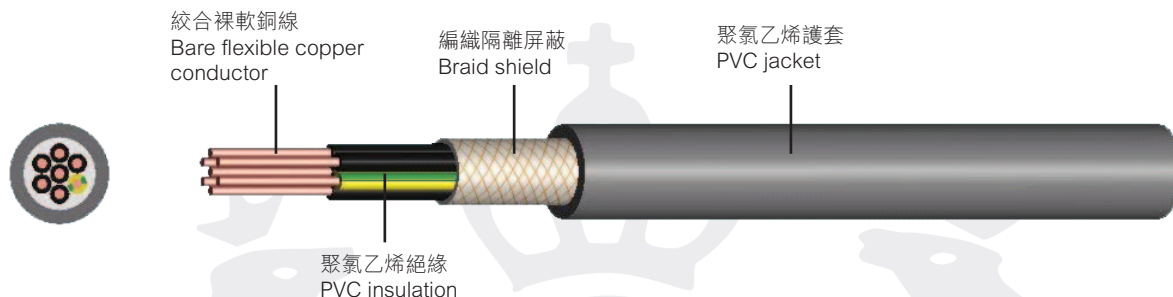

ROYAL HORSE JB/T8734 RVVP NxN.Nmm² PVC/PVC CABLE 300/300V

說明

- 工作溫度：70°C
- 額定電壓：300/300V
- 標準：JB/T8734
- 型號：RVVP
- 導體使用絞合裸銅線
- 聚氯乙烯或阻燃聚氯乙烯絕緣
- 鍍錫或裸銅線編織屏蔽
- 聚氯乙烯或阻燃聚氯乙烯護套

應用

- 控制、監控回路及保護線路等場合使用
- 敷設在室內、移動要求柔軟、防干擾等場合

DESCRIPTION

- Rated temperature: 70°C
- Rated voltage: 300/300V
- Reference standard: JB/T8734
- Model: RVVP
- Bare flexible copper conductor
- PVC or flame retardant PVC insulation
- Tinned or bare copper wire braid shield available
- PVC or flame retardant PVC jacket

APPLICATION

- For control system, protective circuit and etc.
- Can be placed indoor, flexible moving, anti-interference and other occasions

聚氯乙稀絕緣護套屏蔽軟電纜

PVC INSULATED AND PVC SHEATHED SHIELDED FLEXIBLE CABLES

截面 Cross-sectional Area (mm ²)	導體結構 No. & diameter of wire (N/mm)	參考外徑 Reference overall diameter (mm)	參考重量 Reference weight (kg/km)
2 x 0.08	7/0.12	4.2	25
2 x 0.12	10/0.12	4.7	30
2 x 0.20	17/0.12	4.9	33
2 x 0.30	26/0.12	5.3	37
2 x 0.40	35/0.12	5.5	40
2 x 0.50	17/0.19	6.2	49
2 x 0.75	26/0.19	6.6	57
2 x 1.0	35/0.19	7.2	69
2 x 1.5	30/0.25	8.1	89
3 x 0.12	10/0.12	5.1	35
3 x 0.20	17/0.12	5.3	39
3 x 0.30	26/0.12	5.6	45
3 x 0.40	35/0.12	5.8	50
3 x 0.50	17/0.19	6.5	60
3 x 0.75	26/0.19	6.9	72
3 x 1.0	35/0.19	7.5	86
3 x 1.5	30/0.25	8.5	114
4 x 0.12	10/0.12	5.1	40
4 x 0.20	17/0.12	5.7	47
4 x 0.30	26/0.12	6.0	54
4 x 0.40	35/0.12	6.3	60
5 x 0.12	10/0.12	5.9	48
5 x 0.20	17/0.12	6.2	54
5 x 0.30	26/0.12	6.5	63
5 x 0.40	35/0.12	6.8	69

聚氯乙烯絕緣護套屏蔽軟電纜

PVC INSULATED AND PVC SHEATHED SHIELDED FLEXIBLE CABLES

6 x 0.12	10/0.12	6.4	52
6 x 0.20	17/0.12	6.7	59
6 x 0.30	26/0.12	7.1	69
6 x 0.40	35/0.12	7.8	84
7 x 0.12	10/0.12	6.4	54
7 x 0.20	17/0.12	6.7	62
7 x 0.30	26/0.12	7.1	73
7 x 0.40	35/0.12	7.8	89
8 x 0.12	10/0.12	6.8	59
8 x 0.20	17/0.12	7.6	76
8 x 0.30	26/0.12	8.0	88
8 x 0.40	35/0.12	8.3	98
10 x 0.12	10/0.12	8.2	78
10 x 0.20	17/0.12	8.7	91
10 x 0.30	26/0.12	9.2	107
10 x 0.40	35/0.12	9.3	121
12 x 0.12	10/0.12	8.0	79
12 x 0.20	17/0.12	8.9	102
12 x 0.30	26/0.12	9.4	119
12 x 0.40	35/0.12	9.8	137
14 x 0.12	10/0.12	8.8	97
14 x 0.20	17/0.12	9.3	114
14 x 0.30	26/0.12	9.8	135
14 x 0.40	35/0.12	10.3	155
16 x 0.12	10/0.12	9.2	107
16 x 0.20	17/0.12	9.8	127
16 x 0.30	26/0.12	10.3	150
16 x 0.40	35/0.12	10.8	165
19 x 0.12	10/0.12	9.7	118
19 x 0.20	17/0.12	10.3	141

聚氯乙稀絕緣護套屏蔽軟電纜**PVC INSULATED AND PVC SHEATHED SHIELDED FLEXIBLE CABLES**

19 x 0.30	26/0.12	10.8	167
19 x 0.40	35/0.12	11.8	203
24 x 0.12	10/0.12	11.2	145
24 x 0.20	17/0.12	11.9	173
24 x 0.30	26/0.12	12.9	219
24 x 0.40	35/0.12	13.6	251

