


## 中型通用橡套軟電纜 (橡套線)

### ORDINARY DUTY RUBBER INSULATED AND SHEATHED FLEXIBLE CORDS

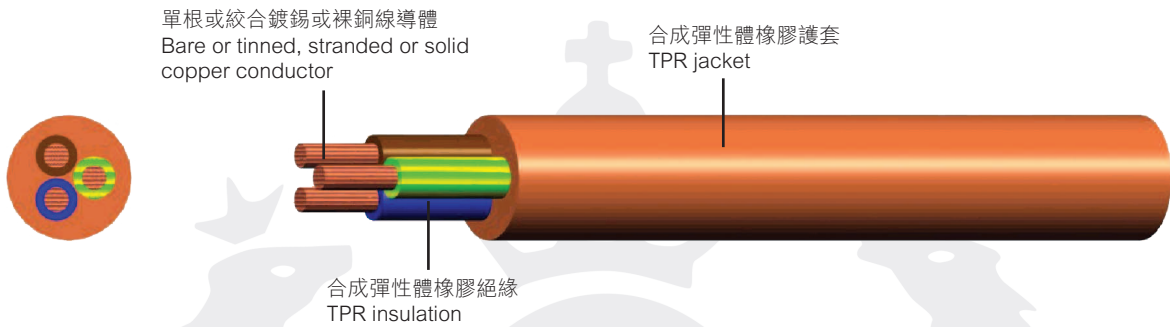

ROYAL HORSE GB/T5013 YZ N x N.Nmm<sup>2</sup> RUBBER CABLE 300/500V  
 or  
 ROYAL HORSE JB/T8735 YZ N x N.Nmm<sup>2</sup> RUBBER CABLE 300/500V

#### 說明

- 工作溫度: 65 °C
- 額定電壓: 300/500V
- 標準: GB/T5013、JB/T8735、IEC60245
- 型號: 245IEC53 (YZ)
- 導體使用單根或絞合鍍錫或裸銅線
- 合成彈性體橡膠絕緣
- 合成彈性體橡膠護套

#### DESCRIPTION

- Rated temperature: 65°C
- Rated voltage: 300/500V
- Reference standard: GB/T5013, JB/T8735, IEC60245
- Model: 245IEC53 (YZ)
- Bare or tinned, stranded copper conductor
- Colour-coded TPR insulation
- TPR jacket

#### 應用

- 工業、農業電氣化中，要求柔軟、彎曲性能好
- 具有耐氣候性和一定的耐油性

#### APPLICATION

- For industrial and agriculture electrical equipment and instrument
- For weather and oil resistance purpose

## 中型通用橡套軟電纜 (橡套線)

### ORDINARY DUTY RUBBER INSULATED AND SHEATHED FLEXIBLE CORDS

截面 Cross-sectional Area (mm <sup>2</sup> )	導體結構 No. & diameter of wire (N/mm)	參考外徑 Reference overall diameter (mm)	參考重量 Reference weight (kg/km)	20°C時最大電阻Ω/km Resistance at 20°C Max	
				銅芯 Copper core	鍍錫銅芯 Tin plated copper core
2 x 0.75	26/0.19	6.2	53	26.0	26.7
2 x 1.0	35/0.19	6.8	65	19.5	20.0
2 x 1.5	30/0.25	8.4	97	13.3	13.7
2 x 2.5	50/0.25	9.8	140	7.98	8.21
2 x 4.0	80/0.25	11.6	201	4.95	5.09
3 x 0.75	26/0.19	6.8	66	26.0	26.7
3 x 1.0	35/0.19	7.2	78	19.5	20.0
3 x 1.5	30/0.25	8.9	117	13.3	13.7
3 x 2.5	50/0.25	10.4	170	7.98	8.21
3 x 4.0	80/0.25	12.3	247	4.95	5.09
3 x 6.0	118/0.25	13.6	325	3.30	3.39
4 x 0.75	26/0.19	7.4	81	26.0	26.7
4 x 1.0	35/0.19	7.8	96	19.5	20.0
4 x 1.5	30/0.25	9.9	149	13.3	13.7
4 x 2.5	50/0.25	11.6	217	7.98	8.21
4 x 4.0	80/0.25	13.7	315	4.95	5.09
4 x 6.0	119/0.25	15.1	415	3.30	3.39
5 x 0.75	26/0.19	8.2	100	26.0	26.7
5 x 1.0	35/0.19	8.8	119	19.5	20.0
5 x 1.5	30/0.25	10.8	179	13.3	13.7
5 x 2.5	50/0.25	12.9	268	7.98	8.21
5 x 4.0	80/0.25	15.2	390	4.95	5.09
5 x 6.0	119/0.25	17.0	522	3.30	3.39