


重型通用橡套軟電纜 (橡套線)

HEAVY DUTY RUBBER INSULATED AND SHEATHED FLEXIBLE CORDS

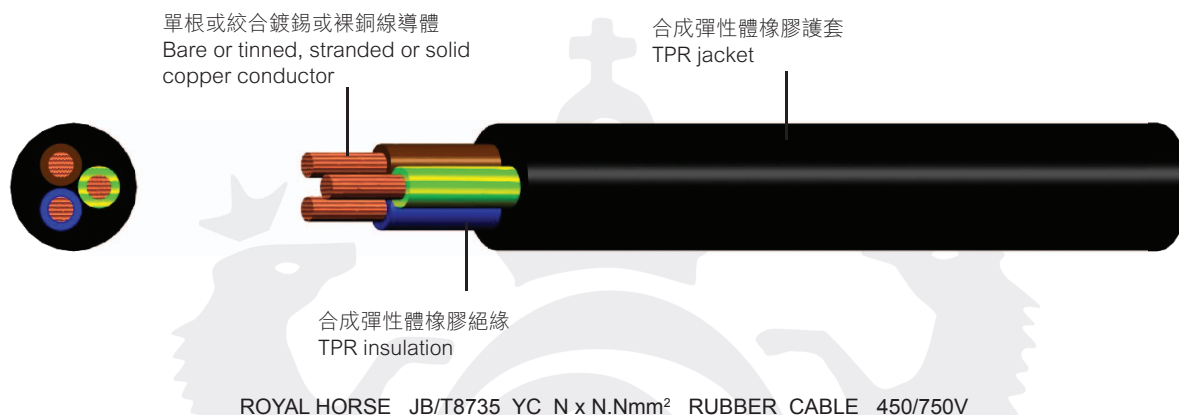

說明

- 工作溫度: 65°C
- 額定電壓: 450/750V
- 標準: JB/T8735
- 型號: YC
- 導體使用單根或絞合鍍錫或裸銅線
- 合成彈性體橡膠絕緣
- 合成彈性體橡膠護套

應用

- 港口機械、探照燈、農業大型水力排灌站等場合
- 具有耐氣候性和一定的耐油性
- 能承受較大的機械外力作用，如港口機械等

DESCRIPTION

- Rated temperature: 65°C
- Rated voltage: 450/750V
- Reference standard: JB/T8735
- Model: YC
- Bare or tinned, stranded copper conductor
- Colour-coded TPR insulation
- TPR jacket

APPLICATION

- Harbor equipment, searchlights, large scale agriculture irrigation system
- For weather and oil resistance purpose
- For external heavy duty usage such as harbor equipment

重型通用橡套軟電纜 (橡套線)

HEAVY DUTY RUBBER INSULATED AND SHEATHED FLEXIBLE CORDS

截面 Cross-sectional Area (mm ²)	導體結構 No. & diameter of wire (N/mm)	參考外徑 Reference overall diameter (mm)	參考重量 Reference weight (kg/km)	20°C時最大電阻 Ω/km Resistance at 20°C Max	
				銅芯 Copper core	鍍錫銅芯 Tin plated copper core
2 x 1.5	30/0.25	9.4	116	13.3	13.7
2 x 2.5	50/0.25	11.0	166	7.98	8.21
2 x 4.0	80/0.25	12.8	232	4.95	5.09
2 x 6.0	119/0.25	14.2	291	3.3	3.39
2 x 10	200/0.25	19.0	534	1.91	1.95
2 x 16	315/0.25	21.6	740	1.21	1.24
2 x 25	350/0.3	25.7	1057	0.78	0.795
2 x 35	494/0.3	28.6	1368	0.554	0.565
2 x 50	684/0.3	33.2	1881	0.386	0.393
2 x 70	969/0.3	37.1	2457	0.272	0.277
2 x 95	1330/0.3	42.3	3270	0.206	0.21
3 x 1.5	30/0.25	10.1	141	13.3	13.7
3 x 2.5	50/0.25	11.8	203	7.98	8.21
3 x 4.0	80/0.25	13.7	286	4.95	5.09
3 x 6.0	119/0.25	15.2	374	3.3	3.39
3 x 10	200/0.25	20.4	665	1.91	1.95
3 x 16	315/0.25	23.2	905	1.21	1.24
3 x 25	350/0.3	27.5	1334	0.78	0.795
3 x 35	494/0.3	30.7	1740	0.554	0.565
3 x 50	684/0.3	35.5	2397	0.386	0.393
3 x 70	969/0.3	39.7	3155	0.272	0.277
3 x 95	1330/0.3	45.5	4230	0.206	0.21
3 x 120	1691/0.3	49.3	5120	0.161	0.164

重型通用橡套軟電纜 (橡膠線)

HEAVY DUTY RUBBER INSULATED AND SHEATHED FLEXIBLE CORDS

截面 Cross-sectional Area (mm ²)	導體結構 No. & diameter of wire (N/mm)	參考外徑 Reference overall diameter (mm)	參考重量 Reference weight (kg/km)	20°C時最大電阻 Ω/km Resistance at 20°C Max	
				銅芯 Copper core	鍍錫銅芯 Tin plated copper core
4 x 1.5	30/0.25	11.1	176	13.3	13.7
4 x 2.5	50/0.25	13.0	254	7.98	8.21
4 x 4.0	80/0.25	15.1	357	4.95	5.09
4 x 6.0	119/0.25	16.9	476	3.3	3.39
4 x 10	200/0.25	22.3	826	1.91	1.95
4 x 16	315/0.25	25.4	1132	1.21	1.24
4 x 25	350/0.3	30.5	1700	0.78	0.795
4 x 35	494/0.3	34.0	2219	0.554	0.565
4 x 50	684/0.3	39.3	3060	0.386	0.393
4 x 70	969/0.3	44.1	4056	0.272	0.277
4 x 95	1330/0.3	50.9	5481	0.206	0.21
4 x 120	1691/0.3	54.7	6587	0.161	0.164
5 x 1.5	30/0.25	12.2	214	13.3	13.7
5 x 2.5	50/0.25	14.3	309	7.98	8.21
5 x 4.0	80/0.25	16.8	444	4.95	5.09
5 x 6.0	119/0.25	18.8	590	3.3	3.39
5 x 10	200/0.25	24.5	1011	1.91	1.95
5 x 16	315/0.25	28.1	1400	1.21	1.24
5 x 25	350/0.3	33.7	2101	0.78	0.795
5 x 35	494/0.3	37.5	2739	0.554	0.565
5 x 50	684/0.3	43.8	3783	0.386	0.393
5 x 70	969/0.3	49.6	5110	0.272	0.277
5 x 95	1330/0.3	56.1	6679	0.206	0.21
5 x 120	1691/0.3	60.7	8185	0.161	0.164