


## 單層或雙層電焊機電纜 (電焊線)

### WELDING CABLES

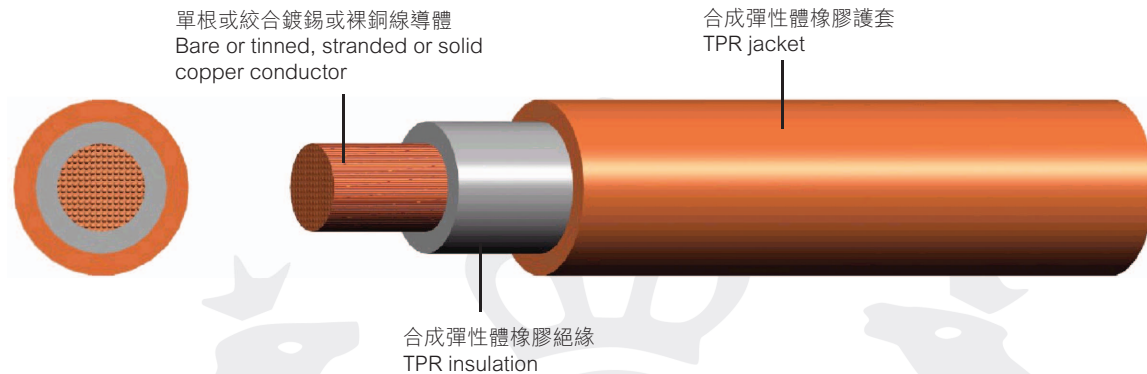

ROYAL HORSE GB/T5013 245IEC82 YHF NNmm<sup>2</sup> ARC WELDING CABLE

#### 說明

- 工作溫度: 65°C
- 額定電壓: 220V
- 標準: GB/T5013、IEC60245
- 型號: 245IEC82 (YHF)
- 導體使用單根或絞合鍍錫或裸銅線
- 合成彈性體橡膠絕緣
- 合成彈性體橡膠護套

#### 應用

- 連接電焊鉗用

#### DESCRIPTION

- Rated temperature: 65°C
- Rated voltage: 220V
- Reference standard: GB/T5013, IEC60245
- Model: 245IEC82 (YHF)
- Bare or tinned, stranded copper conductor
- Colour-coded TPR insulation
- TPR jacket

#### APPLICATION

- For connecting welding clamp

## 單層或雙層電焊機電纜 (電焊線)

### WELDING CABLES

截面 Cross-sectional Area (mm <sup>2</sup> )	導體結構 No. & diameter of wire (N/mm)	參考外徑 Reference overall diameter (mm)	參考重量 Reference weight (kg/km)	20°C時最大電阻Ω/km Resistance at 20°C Max	
				銅芯 Copper core	鍍錫銅芯 Tin plated copper core
單層 / 雙層電焊機電纜					
16	315/0.25	9.3	207	1.210	1.240
25	500/0.25	11.1	312	0.780	0.795
35	700/0.25	12.6	424	0.554	0.565
50	1000/0.25	14.3	582	0.386	0.393
70	1400/0.25	16.9	807	0.272	0.277
95	1920/0.25	19.3	1084	0.206	0.210
120	2400/0.25	21.4	1354	0.161	0.164
150	2960/0.25	23.1	1634	0.129	0.132
185	3689/0.25	25.5	2037	0.106	0.108
240	4760/0.25	28.4	2575	0.0801	0.0817
300	5957/0.25	31.4	3185	0.0641	0.0654

