


## 聚氯乙烯絕緣護套電纜 (單枝雙膠)

### PVC INSULATED PVC SHEATHED CABLES (SINGLE-CORE)

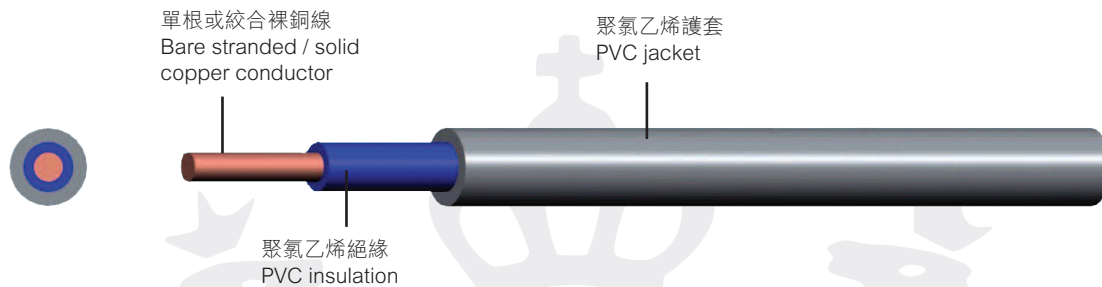

ROYAL HORSE 300/500V N.Nmm<sup>2</sup> PVC/PVC CABLE JB/T8734 CCC A007306

or

ROYAL HORSE JB/T8734 N.Nmm<sup>2</sup> PVC/PVC CABLE 300/500V (MODEL 9/9.9)

#### 說明

- 工作溫度: 70°C
- 額定電壓: 300/500V
- 標準: JB/T8734.2
- 型號: BVV
- 導體使用單根或絞合裸銅線
- 阻燃聚氯乙烯絕緣
- 阻燃聚氯乙烯護套

#### 應用

- 固定布線
- 要求機械防護較高、潮濕等場合
- 可明敷或暗敷

#### DESCRIPTION

- Rated temperature: 70°C
- Rated voltage: 300/500V
- Reference standard: JB/T8734.2
- Model: BVV
- Bare stranded or solid copper conductor
- Flame retardant colour-coded PVC insulation
- Flame retardant PVC jacket

#### APPLICATION

- For fixed wiring
- Use in higher protection required or humid environment
- Can be placed into trunk and conduit

## 聚氯乙稀絕緣護套電纜 (單枝雙膠)

### PVC INSULATED PVC SHEATHED CABLES (SINGLE-CORE)

截面 Cross-sectional Area (mm <sup>2</sup> )	導體結構 No. & diameter of wire (N/mm)	參考外徑 Reference overall diameter (mm)	參考重量 Reference weight (kg/km)	最小絕緣電阻 Insulation Resistance (MΩ · km) 70°C Min
0.75	1/0.98	3.8	23	0.012
1.0	1/1.13	3.9	25	0.011
1.5	1/1.38	4.4	33	0.011
1.5	7/0.52	4.6	36	0.010
2.5	1/1.78	5.0	47	0.010
2.5	7/0.67	5.2	51	0.009
4.0	1/2.25	5.7	68	0.0085
4.0	7/0.85	6.0	71	0.0077
6.0	1/2.76	6.2	88	0.0070
6.0	7/1.04	6.5	93	0.0065
10	7/1.35	7.9	147	0.0065
16	7/1.70	9.1	216	0.0050
25	7/2.14	10.8	324	0.0050
35	19/1.53	12.3	430	0.0040
50	19/1.78	13.9	570	0.0045
70	19/2.14	15.9	792	0.0035
95	19/2.52	18.6	1092	0.0035
120	37/2.03	20.6	1362	0.0032
150	37/2.25	23.0	1681	0.0032
185	37/2.52	25.2	2076	0.0032
240	61/2.24	28.7	2706	0.0032
300	61/2.52	31.5	3347	0.0030