


聚氯乙稀絕緣、鋼絲鎧裝、聚氯乙稀護套電力電纜 (多芯) PVC INSULATED, STEEL WIRE ARMoured, PVC SHEATHED POWER CABLES (MULTI-CORE)

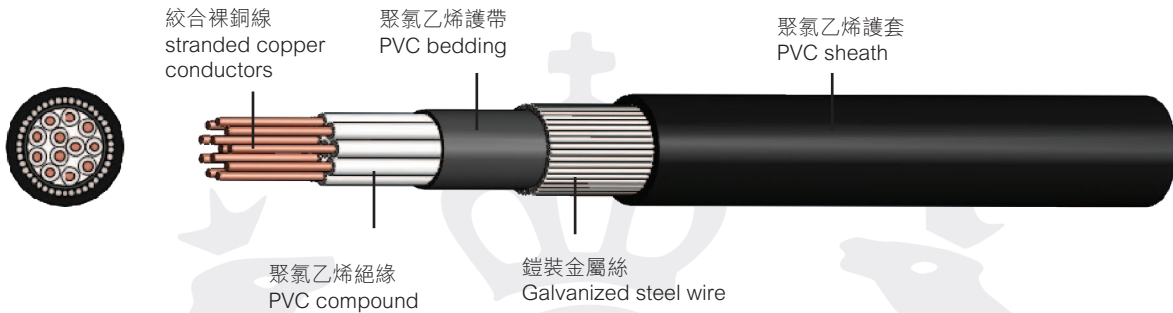

ROYAL HORSE 0.6/1KV N×NN SQMM PVC/SWA/PVC CABLE IEC 60502-1 KEMA-KEUR

說明

- 工作溫度: 70°C
- 額定電壓: 600/1000V
- 標準: GB12706-2008、IEC60502、BS6346
- 型號: VV₃₂
- 導體使用絞合裸銅線
- 阻燃聚氯乙稀絕緣
- 阻燃聚氯乙稀內墊層
- 鎧裝金屬絲
- 阻燃聚氯乙稀護套

應用

- 固定敷設在隧道、管道、電纜溝等場合
- 適用於電源電路控制、電站、地下隧道、儀錶儀器、報警系統等
- 能承受機械外力和相當的拉力

DESCRIPTION

- Rated Temperature: 70°C
- Rated Voltage: 600/1000V
- Reference Standard: GB/T12706-2008, IEC60502, BS6346
- Model: VV₃₂
- Shaped stranded copper conductors
- Flame retardant insulated with PVC compound
- PVC bedded
- Galvanized steel wire armoured
- Flame retardant PVC sheathed overall

APPLICATION

- For underground installation in transport and power distribution
- For power control circuits, power stations, underground tunnels, instrumentation, alarm systems
- Protection against mechanical aggressions and rodents

聚氯乙稀絕緣、鋼絲鎧裝、聚氯乙稀護套電力電纜 (多芯)
PVC INSULATED, STEEL WIRE ARMoured, PVC SHEATHED
POWER CABLES (MULTI-CORE)

截面 Cross-sectional Area (mm ²)	導體結構 No.& diameter of wire (N/mm)	參考外徑 Reference overall diameter (mm)	參考重量 Reference weight (kg/km)	導體最大電阻 Conductor Resistanece (Ω/km) 20°C Max
1.5 x 5	1/1.38	15.7	124	12.1
1.5 x 5	7/0.52	16.6	132	12.1
1.5 x 7	1/1.38	17.0	136	12.1
1.5 x 7	7/0.52	17.6	141	12.1
1.5 x 10	1/1.38	20.0	164	12.1
1.5 x 10	7/0.52	20.8	170	12.1
1.5 x 12	1/1.38	20.5	169	12.1
1.5 x 12	7/0.52	21.3	175	12.1
1.5 x 19	1/1.38	23.8	206	12.1
1.5 x 19	7/0.52	24.8	211	12.1
1.5 x 27	1/1.38	27.3	234	12.1
1.5 x 27	7/0.52	28.5	248	12.1
1.5 x 37	1/1.38	30.0	274	12.1
1.5 x 37	7/0.52	31.6	298	12.1
1.5 x 48	1/1.38	34.7	351	12.1
1.5 x 48	7/0.52	36.7	372	12.1
2.5 x 5	1/1.78	17.2	138	7.41
2.5 x 5	7/0.67	17.7	142	7.41
2.5 x 7	1/1.78	18.2	148	7.41
2.5 x 7	7/0.67	18.8	154	7.41
2.5 x 10	1/1.78	22.4	188	7.41
2.5 x 10	7/0.67	23.2	199	7.41
2.5 x 12	1/1.78	22.9	196	7.41
2.5 x 12	7/0.67	23.8	204	7.41
2.5 x 19	1/1.78	25.8	220	7.41
2.5 x 19	7/0.67	26.8	231	7.41

聚氯乙稀絕緣、鋼絲鎧裝、聚氯乙稀護套電力電纜 (多芯)
PVC INSULATED, STEEL WIRE ARMoured, PVC SHEATHED
POWER CABLES (MULTI-CORE)

截面 Cross-sectional Area (mm ²)	導體結構 No.& diameter of wire (N/mm)	參考外徑 Reference overall diameter (mm)	參考重量 Reference weight (kg/km)	導體最大電阻 Conductor Resistanece (Ω/km) 20°C Max
2.5 x 27	1/1.78	29.9	272	7.41
2.5 x 27	7/0.67	31.3	296	7.41
2.5 x 37	1/1.78	33.8	328	7.41
2.5 x 37	7/0.67	35.4	361	7.41
2.5 x 48	1/1.78	38.5	409	7.41
2.5 x 48	7/0.67	40.4	447	7.41
4.0 x 5	7/0.85	20.4	167	4.61
4.0 x 7	7/0.85	22.6	191	4.61
4.0 x 10	7/0.85	27.2	234	4.61
4.0 x 12	7/0.85	27.9	240	4.61
4.0 x 19	7/0.85	32.2	305	4.61
4.0 x 27	7/0.85	39.1	417	4.61
4.0 x 37	7/0.85	43.4	497	4.61
4.0 x 48	7/0.85	50.5	640	4.61

