


## 聚氯乙烯絕緣護套扁型電纜 (雙枝雙膠)

### PVC INSULATED AND PVC SHEATHED CABLES (FLAT TWIN)

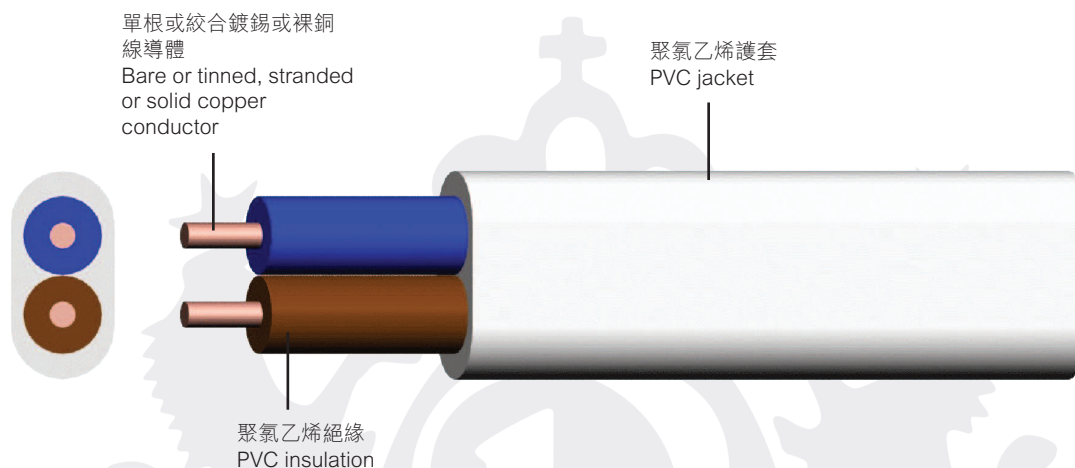

TO BS6004 2 x N.NNmm<sup>2</sup> PVC/PVC FLAT CABLE 300/500V R.H.

#### 說明

- 工作溫度: 70 °C
- 額定電壓: 300/500V
- 標準: JB/T8734.2、BS6004
- 型號: BVVB
- 導體使用單根或絞合鍍錫或裸銅線
- 阻燃聚氯乙烯絕緣
- 阻燃聚氯乙烯護套

#### 應用

- 固定布線
- 要求機械防護較高、潮濕等場合
- 可明敷或暗敷

#### DESCRIPTION

- Rated temperature: 70°C
- Rated voltage: 300/500V
- Reference standard: JB/T8734.2, BS6004
- Model: BVVB
- Bare or tinned, stranded or solid copper conductor
- Flame retardant colour-coded PVC insulation
- Flame retardant PVC jacket

#### APPLICATION

- For fixed wiring
- Use in higher protection required or humid environment
- Can be placed into trunk and conduit

**聚氯乙稀絕緣護套扁型電纜 (雙枝雙膠)****PVC INSULATED AND PVC SHEATHED CABLES****(FLAT TWIN)**

截面 Cross-sectional Area (mm <sup>2</sup> )	導體結構 No. & diameter of wire (N/mm)	參考外徑 Reference overall diameter (mm)	參考重量 Reference weight (kg/km)	最小絕緣電阻 Insulation Resistance (MΩ · km) 70°C Min
2 x 0.75	1/0.98	3.8 x 6.2	42	0.012
2 x 1.0	1/1.13	4.1 x 6.6	50	0.011
2 x 1.5	1/1.38	4.4 x 7.2	63	0.011
2 x 2.5	1/1.78	5.2 x 8.6	93	0.010
2 x 4.0	7/0.85	6.0 x 10.4	141	0.0080
2 x 6.0	7/1.04	7.0 x 12.4	202	0.0065
2 x 10	7/1.35	8.6 x 14.8	315	0.0065
2 x 16	7/1.70	9.9 x 17.1	457	0.0052

