


交聯聚乙烯絕緣、鋼絲鎧裝、聚氯乙烯護套電力電纜 (多芯) XLPE INSULATED, STEEL WIRE ARMoured, PVC SHEATHED POWER CABLES (MULTI-CORE)

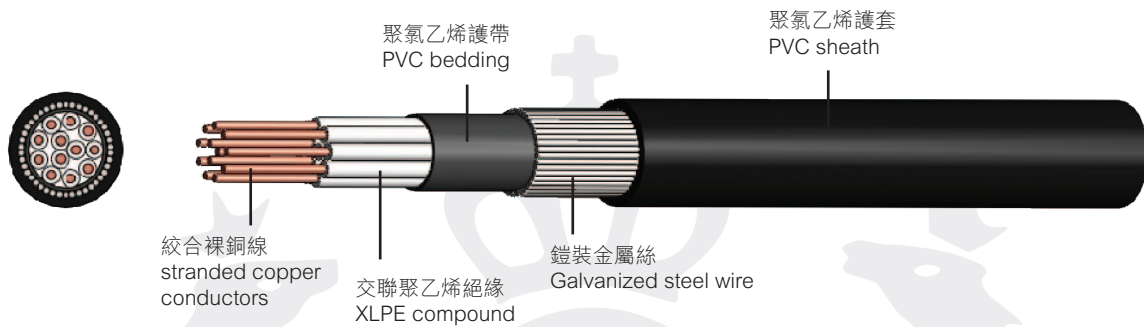

ROYAL HORSE 0.6/1KV N×NN SQMM XLPE/SWA/PVC CABLE IEC 60502-1 KEMA-KEUR

說明

- 工作溫度: 90°C
- 額定電壓: 600/1000V
- 標準: GB/T12706、IEC60502、BS5467
- 型號: YJV₃₂
- 導體使用絞合裸銅線
- 交聯聚乙烯絕緣
- 阻燃聚氯乙烯內墊層
- 鎧裝金屬絲
- 阻燃聚氯乙烯護套

應用

- 固定敷設在隧道、管道、電纜溝等場合
- 適用於電源電路控制、電站、地下隧道、儀錶儀器、報警系統等
- 能承受機械外力和相當的拉力

DESCRIPTION

- Rated Temperature: 90°C
- Rated Voltage: 600/1000V
- Reference Standard: GB/T12706, IEC60502, BS5467
- Model: YJV₃₂
- Shaped stranded copper conductors
- Insulated with cross-link polyethylene compound
- PVC bedded
- Galvanized steel wire armoured
- Flame retardant PVC sheathed overall

APPLICATION

- For underground installation in transport and power distribution
- For power control circuits, power stations, underground tunnels, instrumentation, alarm systems
- Protection against mechanical aggressions and rodents

交聯聚乙烯絕緣、鋼絲鎧裝、聚氯乙烯護套電力電纜 (多芯)
XLPE INSULATED, STEEL WIRE ARMoured, PVC
SHEATHED POWER CABLES (MULTI-CORE)

截面 Cross-sectional Area (mm ²)	導體結構 No.& diameter of wire (N/mm)	參考外徑 Reference overall diameter (mm)	參考重量 Reference weight (kg/km)	導體最大電阻 Conductor Resistaneec (Ω/km) 20°C Max
1.5 x 5	1/1.38	15.2	458	12.1
1.5 x 5	7/0.52	15.7	478	12.1
1.5 x 7	1/1.38	16.0	506	12.1
1.5 x 7	7/0.52	16.6	544	12.1
1.5 x 12	1/1.38	19.6	776	12.1
1.5 x 12	7/0.52	20.5	821	12.1
1.5 x 19	1/1.38	22.0	991	12.1
1.5 x 19	7/0.52	23.0	1041	12.1
1.5 x 27	1/1.38	26.0	1427	12.1
1.5 x 27	7/0.52	27.3	1506	12.1
1.5 x 37	1/1.38	28.4	1705	12.1
1.5 x 37	7/0.52	30.0	1828	12.1
1.5 x 48	1/1.38	32.0	2089	12.1
1.5 x 48	7/0.52	33.7	2206	12.1
2.5 x 5	1/1.78	16.6	543	7.41
2.5 x 5	7/0.67	17.3	571	7.41
2.5 x 7	1/1.78	17.6	678	7.41
2.5 x 7	7/0.67	18.2	707	7.41
2.5 x 12	1/1.78	21.3	961	7.41
2.5 x 12	7/0.67	22.1	1004	7.41
2.5 x 19	1/1.78	24.8	1402	7.41
2.5 x 19	7/0.67	25.8	1472	7.41
2.5 x 27	1/1.78	28.5	1800	7.41
2.5 x 27	7/0.67	29.9	1915	7.41
2.5 x 37	1/1.78	31.6	2226	7.41
2.5 x 37	7/0.67	33.0	2341	7.41