


防火電纜 (單枝單膠)

FIRE RESISTANT CABLES (SINGLE-CORE)

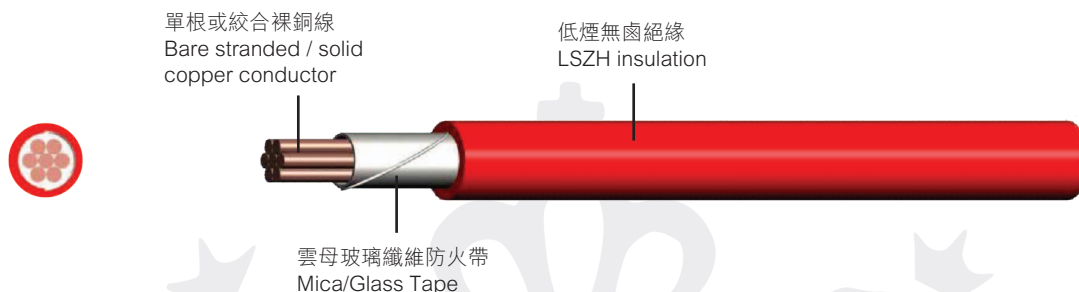

ROYAL HORSE 450/750V N.Nmm² H07Z1-R (TYPE 1) FR LSZH CABLE BS6387 CWZ IEC 60331 KEMA KEUR
Or
ROYAL HORSE 0.6/1KV N.Nmm² H07Z1-R (TYPE 1) FR LSZH CABLE BS6387 CWZ IEC 60331 KEMA KEUR

說明

- 工作溫度: 90 °C
- 額定電壓: 450/750V、600/1000V
- 標準: BS6387 (類別CWZ)
 - IEC60331、IEC60332-1
 - IEC60754、IEC61034、GB/T 19666、GB/T 5023、GA306.2
- 型號: H07Z1-R (TYPE 1)
- 導體使用絞合裸銅線
- 雲母玻璃纖維防火帶
- 低煙無鹵絕緣

應用

- 固定布線
- 重要安全電路, 可用於室內明敷、穿管等場合
- 所在區域需要關鍵電路的完整保持電源

DESCRIPTION

- Rated temperature: 90°C
- Rated voltage: 450/750V, 600/1000V
- Reference standard: BS6387 (category CWZ), IEC60331, IEC60332-1, IEC60754, IEC61034, GB/T 19666, GB/T 5023, GA306.2
- Model: H07Z1-R (TYPE 1)
- Bare stranded copper conductor
- Mineral ceramic (Mica/Glass) fire resistant tape
- LSZH insulation

APPLICATION

- For fixed wiring
- Essential safety circuits where the cable is protected by trunk or conduit
- For areas where the integrity of the electrical circuit is critical in maintaining power supply

防火電纜 (單枝單膠)**FIRE RESISTANT CABLES (SINGLE-CORE)**

截面 Cross-sectional Area (mm ²)	導體結構 No. & diameter of wire (N/mm)	參考外徑 Reference overall diameter (mm)	參考重量 Reference weight (kg/km)	最小絕緣電阻 Insulation Resistance (MΩ · km) 70°C Min
1.5	7/0.52	3.8	28	0.010
2.5	7/0.67	4.5	42	0.009
4.0	7/0.85	5.0	58	0.0077
6.0	7/1.04	5.7	82	0.0065
10	7/1.35	7.0	130	0.0065
16	7/1.70	8.1	192	0.0050
25	7/2.14	9.8	293	0.0050
35	19/1.53	11.0	391	0.0040
50	19/1.78	12.7	525	0.0045
70	19/2.14	14.5	732	0.0035
95	19/2.52	16.8	1004	0.0035
120	37/2.03	18.4	1250	0.0032
150	37/2.25	20.3	1533	0.0032
185	37/2.52	22.6	1914	0.0032
240	61/2.25	25.6	2496	0.0032
300	61/2.52	28.4	3114	0.0030
400	91/2.36	32.1	4041	0.0028

截面1.5 — 10 mm² 額定電壓是450/750V.

Sizes 1.5 — 10mm² are rated at 450/750V.