


## 輕型或普通型低煙無鹵絕緣護套軟電線

### LIGHT OR ORDINARY DUTY LSZH INSULATED LSZH SHEATHED FLEXIBLE CABLES

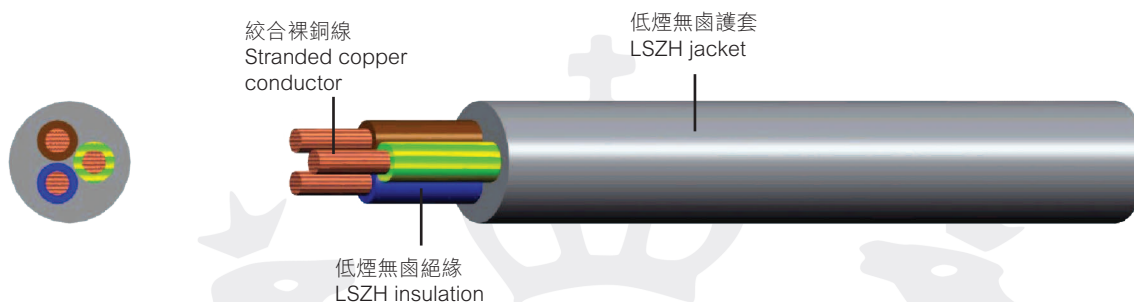

ROYAL HORSE 300/300V N x N.Nmm<sup>2</sup> (H03Z1Z1-F) LSZH CABLE HD 21.14 S1  
 or  
 ROYAL HORSE 300/500V N x N.Nmm<sup>2</sup> (H05Z1Z1-F) LSZH CABLE HD 21.14 S1

#### 說明

- 工作溫度: 70°C
- 額定電壓: 300/300V、300/500V
- 標準: HD 21.14 S1
- 型號: H03Z1Z1-F/ H05Z1Z1-F
- 導體使用絞合裸銅線
- 阻燃低煙無鹵絕緣
- 阻燃低煙無鹵護套

#### 應用

- 中輕型移動電器、儀器儀表、家用電器、動力照明等使用時要求柔軟的場合
- 用於煉油廠的能源網絡，高建築，商業中心，在那裡有火災危險

#### DESCRIPTION

- Rated temperature: 70°C
- Rated voltage: 300/300V, 300/500V
- Reference standard: HD 21.14 S1
- Model: H03Z1Z1-F/ H05Z1Z1-F
- Stranded copper conductor
- Flame retardant color-coded LSZH insulation
- Flame retardant LSZH jacket

#### APPLICATION

- For light or medium size home appliances, instrument & meters, and power-driven lighting
- Used in energy networks in refineries, high constructions, business centers where there is risk of fire

**輕型或普通型低煙無鹵絕緣護套軟電線****LIGHT OR ORDINARY DUTY LSZH INSULATED LSZH SHEATHED FLEXIBLE CABLES**

截面 Cross-sectional Area (mm <sup>2</sup> )	導體結構 No. & diameter of wire (N/mm)	參考外徑 Reference overall diameter (mm)	參考重量 Reference weight (kg/km)	最小絕緣電阻 Insulation Resistance (MΩ · km) 70°C Min
H03Z1Z1-F				
2 x 0.5	17/0.19	5.8	46	0.012
2 x 0.75	26/0.19	6.2	55	0.010
3 x 0.5	17/0.19	6.1	56	0.012
3 x 0.75	26/0.19	6.5	67	0.010
H05Z1Z1-F				
2 x 0.75	26/0.19	6.4	60	0.011
2 x 1.0	35/0.19	6.8	70	0.010
2 x 1.5	30/0.25	7.8	93	0.010
2 x 2.5	50/0.25	9.2	136	0.009
3 x 0.75	26/0.19	6.8	71	0.011
3 x 1.0	35/0.19	7.2	83	0.010
3 x 1.5	30/0.25	8.3	113	0.010
3 x 2.5	50/0.25	10.0	172	0.009
4 x 0.75	26/0.19	7.4	85	0.011
4 x 1.0	35/0.19	7.8	101	0.010
4 x 1.5	30/0.25	9.3	141	0.010
4 x 2.5	50/0.25	10.9	213	0.009
5 x 0.75	26/0.19	8.0	100	0.011
5 x 1.0	35/0.19	8.6	132	0.010
5 x 1.5	30/0.25	10.3	178	0.010
5 x 2.5	50/0.25	12.1	264	0.009