


聚氯乙烯絕緣護套扁型電纜(三平線)

PVC INSULATED AND PVC SHEATHED CABLES (THREE CORES)

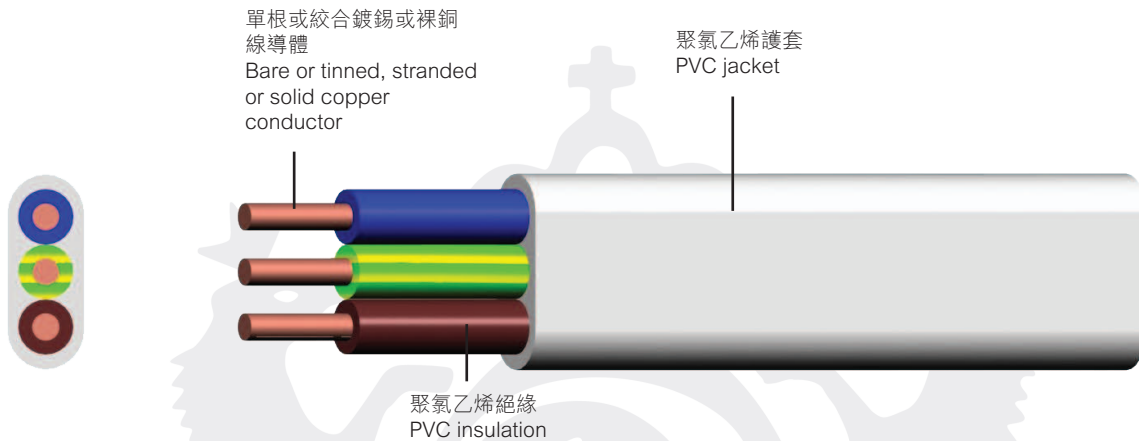

TO BS6004 N X N.Nmm² PVC/PVC FLAT CABLE 300/500V R.H.

說明

- 工作溫度: 70°C
- 額定電壓: 300/500V
- 標準: JB/T8734.2、BS6004
- 型號: BVVB
- 導體使用單根或絞合鍍錫或裸銅線
- 阻燃聚氯乙烯絕緣
- 阻燃聚氯乙烯護套

應用

- 固定布線
- 要求機械防護較高、潮濕等場合
- 可明敷或暗敷

DESCRIPTION

- Rated temperature: 70°C
- Rated voltage: 300/500V
- Reference standard: JB/T8734.2, BS6004
- Model: BVVB
- Bare or tinned, stranded or solid copper conductor
- Flame retardant colour-coded PVC insulation
- Flame retardant PVC jacket

APPLICATION

- For fixed wiring
- Use in higher protection required or humid environment
- Can be placed into trunk and conduit

聚氯乙稀絕緣護套扁型電纜(三平線)**PVC INSULATED AND PVC SHEATHED CABLES
(THREE CORES)**

截面 Cross-sectional Area (mm ²)	導體結構 No. & diameter of wire (N/mm)	參考外徑 Reference overall diameter (mm)	參考重量 Reference weight (kg/km)	最小絕緣電阻 Insulation Resistance (MΩ · km) 70°C Min
3 x 0.75	1/0.98	4.0 x 8.4	61	0.012
3 x 1.0	1/1.13	4.1 x 8.7	73	0.011
3 x 1.5	1/1.38	4.6 x 10.2	93	0.011
3 x 1.5	7/0.52	4.8 x 10.8	102	0.010
3 x 2.5	1/1.78	5.4 x 12.2	137	0.010
3 x 2.5	7/0.67	5.6 x 12.8	150	0.009
3 x 4.0	1/2.25	5.9 x 13.7	197	0.0085
3 x 4.0	7/0.85	6.2 x 14.6	209	0.0077
3 x 6.0	7/1.04	6.9 x 16.3	283	0.0070
3 x 10	7/1.35	8.5 x 20.7	456	0.0065
3 x 16	7/1.70	9.7 x 23.9	666	0.0050

