


防火報警電纜

FIRE RESISTANT FIRE ALARM CABLE

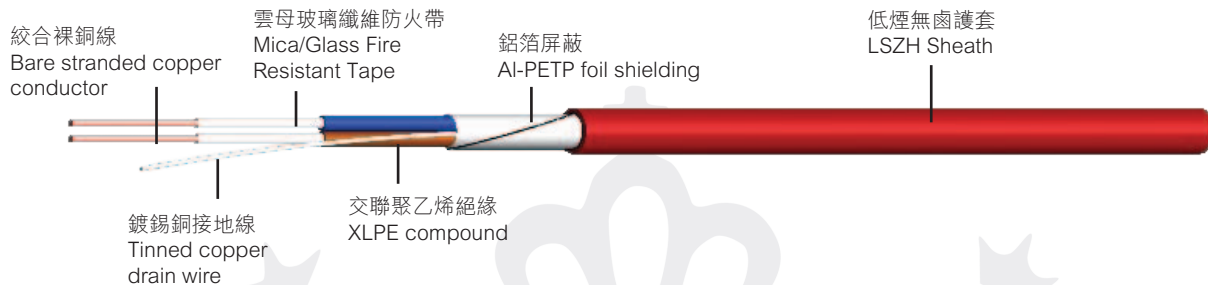

ROYAL HORSE 300/500V N x N.N SQMM FR FIRE ALARM CABLE TO BS5839-1 BS6387 CWZ

說明

- 工作溫度: 90 °C
- 額定電壓: 300/500V
- 標準: BS5839-1:2002
 - BS6387 (CWZ)、EN 50200
 - EN 8434-2、IEC60331
 - IEC60332-1、IEC60332-3
 - IEC60754、IEC61034
- 型號: FR FireAlarm
- 導體使用絞合裸銅線
- 防火雲母帶
- 交聯聚乙烯絕緣
- 靜電屏幕的塑料塗層鋁箔與鍍錫接
- 地線0.5平方毫米(7x0.3mm)
- 阻燃低煙無鹵護套

應用

- 適用於核電站、地下鐵道、隧道、機場、碼頭、廣播電視塔等要求高阻燃防火的場合
- 在燃燒情況下需要低煙和低腐蝕性氣體放射

DESCRIPTION

- Rated Temperature: 90°C
- Rated Voltage: 300/500V
- Reference Standard: BS5839-1:2002, BS6387 (Category CWZ), EN 50200, EN 8434-2, IEC60331, IEC60332-1, IEC60332-3, IEC60754, IEC61034
- Model: FR FireAlarm
- Solid or stranded bare copper conductors
- Mica/Glass fire resistant tape
- Insulated with cross-link polyethylene compound
- Electrostatic screen of plastic coated aluminium foil with tinned drain-wire 0.5mm² (7x0.3mm)
- LSZH sheathed overall

APPLICATION

- For nuclear power plants, underground railways, tunnels, airports, docks, radio tower and other high fire resistant requirements situation
- For situations in which low emission of smoke and acid gases is required in the case of burning

防火報警電纜

FIRE RESISTANT FIRE ALARM CABLE

截面 Cross-sectional Area (mm ²)	導體結構 No.& diameter of wire (N/mm)	平均外徑 Average overall diameter (mm)	參考重量 Reference weight (kg/km)	導體最大電阻 Conductor Resistance (Ω/km) 20°C Max
2x1.0	1/1.13	8.0	80	18.1
2x1.5	1/1.38	8.1	95	12.1
2x2.5	1/1.78	9.5	135	7.41
2x4.0	7/0.85	11.6	210	4.61
3x1.0	1/1.13	8.2	95	18.1
3x1.5	1/1.38	8.4	115	12.1
3x2.5	1/1.78	10.4	170	7.41
3x4.0	7/0.85	12.3	260	4.61
4x1.0	1/1.13	8.5	115	18.1
4x1.5	1/1.38	10	150	12.1
4x2.5	1/1.78	11.9	210	7.41
4x4.0	7/0.85	13.5	330	4.61

