


公用天線電視寬頻電纜

CATV BROADBAND VIDEO CABLE

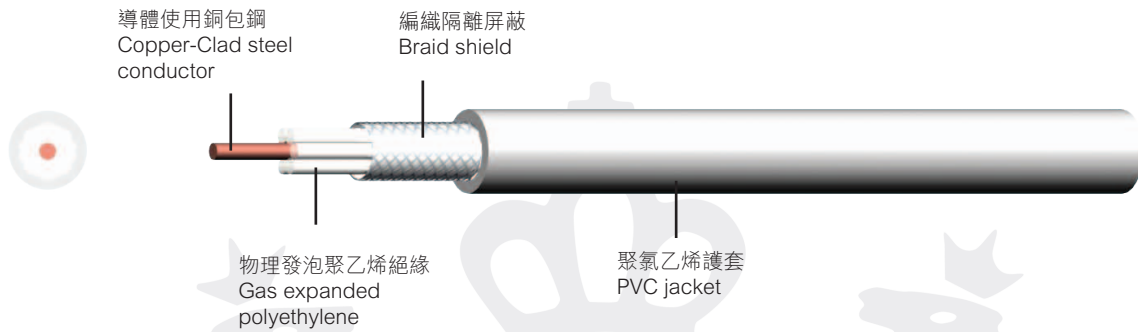

ROYAL HORSE RG-6/U COAXIAL CABLE 75 OHMS
or
ROYAL HORSE COAXIAL COLOR 5C-2V 75 OHM

說明

- 工作溫度: 60°C
- 阻抗: 75 Ω
- 導體使用銅包鋼或裸銅
- 物理發泡聚乙烯絕緣
- 鋁箔編織隔離屏蔽層
- 阻燃聚氯乙烯護套
- 通過GB/T12666.2垂直耐燃測試

DESCRIPTION

- Rated temperature: 60°C
- Nominal Impedance: 75 Ω
- Copper-Clad steel or bare solid copper conductor
- Dielectric: Gas expanded polyethylene
- Aluminum foil and Aluminum braided wire shield
- Flame retardant PVC jacket
- Passes GB/T12666.2 vertical flame test

應用

- 用於CATV和MATV系統的接入電纜

APPLICATION

- Drop cable for CATV and MATV distribution

公用天線電視寬頻電纜

CATV BROADBAND VIDEO CABLE

TYPE	導體 Conductor		絕緣 Dielectric		屏蔽 Shield		護套 厚度 Jacket Nom. Thick. (mm)	電纜 外徑 Cable Nom. Dia. (mm)	阻抗 Nom. Imp. (Ω)
	線規 AWG	種類 Type	材質 Mat.	外徑 No. Dia.	材質 Mat.	覆蓋率 Coverage			
RG-6/U	18	CCS	FPE	4.8	Al foil	45%	0.84	7.0	75
	18	CCS	FPE	4.8	Al foil	60%	0.84	7.0	75
	18	CCS	FPE	4.8	Al foil	90%	0.84	7.0	75
	18	BC	FPE	4.8	Al foil	45%	0.84	7.0	75
	18	BC	FPE	4.8	Al foil	60%	0.84	7.0	75
	18	BC	FPE	4.8	Al foil	90%	0.84	7.0	75

BC — 裸銅 (Bare copper)

CCS — 銅包鋼 (Copper-Clad Steel)

FPE — 發泡聚乙烯絕緣 (Foamed polyethylene insulation)

