


RG 同軸電纜

RG TYPE COAXIAL CABLE

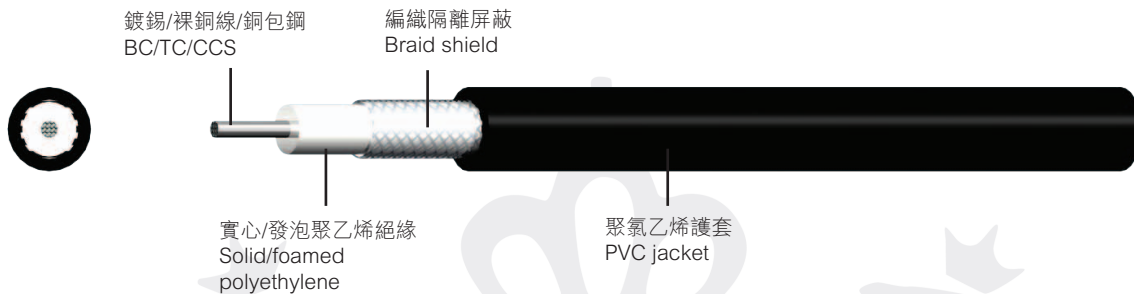

ROYAL HORSE RG58A/U 50 Ω HIGH-GRADE COAXIAL CABLE FOR COMPUTER NETWORK OR C.C.T.V.

說明

- 阻抗: 50 Ω
- 導體使用單根或絞合鍍錫或裸銅線或銅包鋼
- 實心或發泡聚乙烯絕緣
- 可加上鋁箔麥拉帶縱包或繞包屏蔽
- 鍍錫或裸銅線編織屏蔽
- 阻燃聚氯乙烯護套

應用

- 用於電腦網絡和C.C.T.V.系統

DESCRIPTION

- Nominal Impedance: 50 Ω
- Tinned or bare, stranded or solid copper conductor or copper clad steel
- Solid or foamed PE insulation
- Longitudinal aluminum mylar shielding
- Tinned or bare copper wire braid shield available
- Flame retardant PVC jacket

APPLICATION

- For computer network or C.C.T.V.

RG 同軸電纜**RG TYPE COAXIAL CABLE**

| TYPE | 導體 Conductor | | 絕緣 Dielectric | | 編織屏蔽 Braid Shield (N/N/mm) | 電纜 外徑 Cable Nom. Dia. (mm) | 阻抗 Nom. Imp. (Ω) |
|------------|-----------------|------------|------------------|----------------|----------------------------------|---|---------------------------|
| | 導體結構 N/mm | 種類 Type | 材質 Mat. | 外徑 No. Dia. | | | |
| RG-58A/U | 7/0.16 | BC | SPE | 1.52 | 16/4/0.1 | 3.0 | 50 |
| RG-58A/U-A | 17/0.19 | TC | FPE | 2.00 | 16/4/0.12 | 3.8 | 50 |
| RG-58A/U-B | 17/0.19 | TC | SPE | 2.95 | 16/7/0.12 | 5.1 | 50 |
| RG-58A/U-C | 7/0.254 | TC | SPE | 2.95 | 16/6/0.12 | 5.1 | 50 |

BC — 裸銅 (Bare copper)

TC — 鍍錫銅 (Tinned copper)

CCS — 銅包鋼 (Copper-Clad Steel)

SPE — 實心聚乙烯 (Solid polyethylene)

