


金銀喇叭線

HIGH QUALITY GOLD/SILVER SPEAKER CABLES

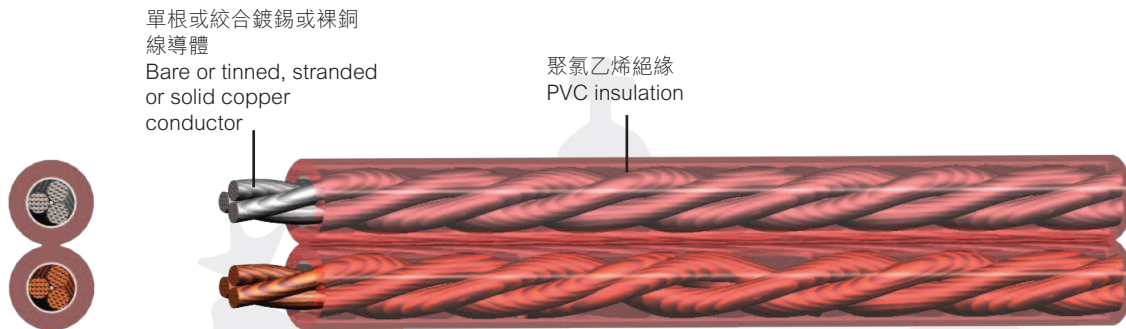

< < HIGH QUALITY SPEAKER WIRE OFEC SUPER AUDIO > >

說明

- 工作溫度: 70°C
- 額定電壓: 300/300V
- 標準: GB/T5023
- 型號: 60227IEC42 (RVB)
- 導體使用單根或絞合鍍錫或裸銅線
- 透明聚氯乙烯絕緣

應用

- 強化輸送系統音響組合

DESCRIPTION

- Rated temperature: 70°C
- Rated voltage: 300/300V
- Reference standard: GB/T5023
- Model: 60227IEC42 (RVB)
- Bare or tinned, stranded or solid copper conductor
- Transparent type PVC insulation

APPLICATION

- For strengthened transmission system of audio Hi-Fi components

金銀喇叭線

HIGH QUALITY GOLD/SILVER SPEAKER CABLES

截面 Cross-sectional Area (mm ²)	導體結構 No. & diameter of wire (N/mm)	平均外徑 Avg overall diameter (mm)	參考重量 Reference weight (kg/km)	20°C時最大電阻 Ω/km Resistance at 20°C Max	
				銅芯 Copper core	鍍錫銅芯 Tin plated copper core
0.50	2 x 21/0.12	3.0 X 6.2	27	39	40.1
0.75	2 x 33/0.12	3.6 X 7.3	39	26	26.7
其它型號 Other Model					
0.55	7 x 7/0.12	3.6 X 6.9	38	36	37.1
0.70	2 x 30/0.12	3.5 X 7.1	37	28	29.2
1.0	2 x 44/0.12	4.2 X 8.5	53	19.5	20
1.13	2 x 49/0.12	4.1 X 8.3	53	17.5	18.4
1.36	2 x 60/0.12	4.3 X 8.8	61	14.6	15.5
1.5	3 x 44/0.12	4.5 X 9.0	67	13.3	13.7
1.5	2 x 26/0.19	4.7 X 9.5	69	13.3	13.7
2.5	3 x 73/0.12	5.5 X 11.2	102	7.98	8.21
2.5	2 x 44/0.19	5.5 X 11.2	102	7.98	8.21
4.0	7 x 50/0.12	6.6 X 13.5	152	4.95	5.09
4.0	3 x 47/0.19	6.6 X 13.5	153	4.95	5.09
6.0	7 x 75/0.12	7.7 X 15.6	215	3.30	3.39
6.0	3 x 70/0.19	7.7 X 15.6	215	3.30	3.39