


聚氯乙烯絕緣護套低頻通信局用電纜

LOW FREQUENCY TELECOMMUNICATION CABLES

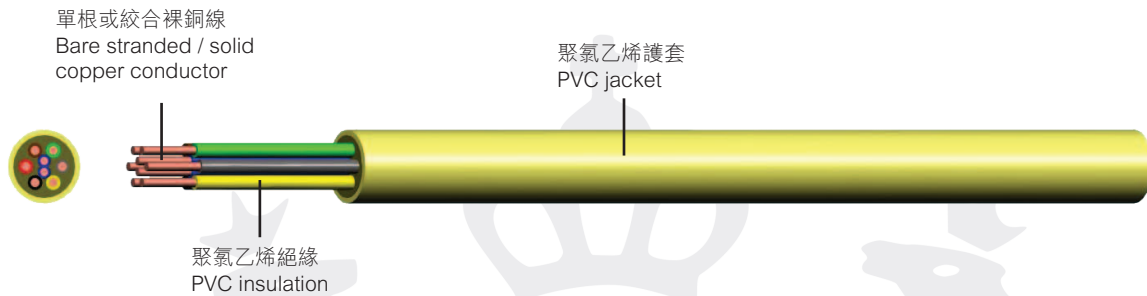

說明

- 工作溫度: 70°C
- 標準: GB/T 11327
- 型號: HJVV、HJVVP (鋁麥拉帶遮罩)
- 導體使用單根或絞合裸銅線
- 阻燃聚氯乙烯絕緣
- 阻燃聚氯乙烯護套

DESCRIPTION

- Rated Temperature: 70°C
- Reference Standard: GB/T 11327
- Model: HJVV, HJVVP (Aluminum mylar shield)
- Bare stranded or solid copper conductor
- Flame retardant PVC insulation
- Flame retardant PVC jacket

應用

- 交換機及其它傳輸設備連接

APPLICATION

- For telecommunication and signal control system

聚氯乙稀絕緣護套低頻通信局用電纜

LOW FREQUENCY TELECOMMUNICATION CABLES

導體結構 No. & diameter of wire (N/N/mm)	導體外徑 Conductor diameter (mm)	參考外徑 Reference overall diameter (mm)	參考重量 Reference weight (kg/km)	最小絕緣電阻 Insulation Resistancee (MΩ · km) 20°C Min
2 X 1/0.5	0.5	3.0	12	500
3 X 1/0.5	0.5	3.4	17	500
4 X 1/0.5	0.5	4.0	22	500
6 X 1/0.5	0.5	4.6	30	500
8 X 1/0.5	0.5	5.2	36	500
10 X 1/0.5	0.5	5.6	43	500
12 X 1/0.5	0.5	6.0	50	500
14 X 1/0.5	0.5	6.5	59	500
16 X 1/0.5	0.5	7.4	74	500
18 X 1/0.5	0.5	7.8	81	500
20 X 1/0.5	0.5	8.3	89	500
30 X 1/0.5	0.5	9.5	124	500
40 X 1/0.5	0.5	10.4	154	500
50 X 1/0.5	0.5	12.2	198	500
60 X 1/0.5	0.5	12.6	226	500
100 X 1/0.5	0.5	15.7	358	500

ROYAL HORSE