


聚氯乙烯絕緣護套控制電纜

PVC INSULATED PVC SHEATHED CONTROL CABLES

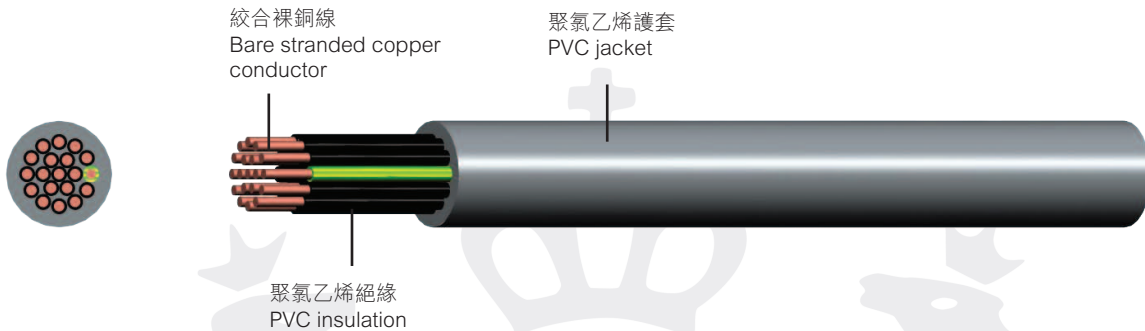

ROYAL HORSE 450/750V NxN.N SQMMPVC/PVC CABLE KVV GB/T9330 IEC60227

說明

- 工作溫度：70°C
- 額定電壓：450/750V
- 標準：GB/T9330.2 (IEC60227)
- 型號：KVV
- 導體使用單根或絞合裸銅線
- 聚氯乙烯或阻燃聚氯乙烯絕緣
- 聚氯乙烯或阻燃聚氯乙烯護套

應用

- 控制、監控回路及保護線路等場合使用
- 敷設在室內、電纜溝、管道固定場合

DESCRIPTION

- Rated temperature: 70°C
- Rated voltage: 450/750V
- Reference standard: GB/T9330.2 (IEC60227)
- Model: KVV
- Bare solid/stranded copper conductor
- PVC or flame retardant PVC insulation
- PVC or flame retardant PVC jacket

APPLICATION

- For control system, protective circuit and etc.
- Can be placed into trunk and conduit

聚氯乙稀絕緣護套控制電纜

PVC INSULATED PVC SHEATHED CONTROL CABLES

截面 Cross-sectional Area (mm ²)	導體結構 No. & diameter of wire (N/mm)	參考外徑 Reference overall diameter (mm)		參考重量 Reference weight (kg/km)	最小絕緣電阻 Insulation Resistance (MΩ/km) 70°C Min
		下限 Lower limit	上限 Upper limit		
2 X 0.75	1/0.98	6.4	8.0	92	0.012
2 X 0.75	7/0.37	6.6	8.4	99	0.014
2 X 1.0	1/1.13	6.8	8.4	100	0.011
2 X 1.0	7/0.43	6.8	8.8	107	0.013
2 X 1.5	1/1.38	7.6	9.4	128	0.011
2 X 1.5	7/0.52	7.8	10.0	137	0.01
2 X 2.5	1/1.78	8.6	10.5	181	0.01
2 X 2.5	7/0.67	9.0	11.5	193	0.01
2 X 4.0	1/2.25	9.6	11.5	231	0.0085
2 X 4.0	7/0.85	10.0	12.5	249	0.0077
2 X 6.0	1/2.76	10.5	12.5	289	0.007
2 X 6.0	7/1.04	11.0	14.0	309	0.0065
2 X 10	7/1.35	14.0	17.5	491	0.0065
3 X 0.75	1/0.98	6.8	8.4	104	0.012
3 X 0.75	7/0.37	7.0	8.8	112	0.014
3 X 1.0	1/1.13	7.0	8.8	115	0.011
3 X 1.0	7/0.43	7.2	9.2	121	0.013
3 X 1.5	1/1.38	8.0	9.8	148	0.011
3 X 1.5	7/0.52	8.2	10.5	169	0.01
3 X 2.5	1/1.78	9.2	11.0	213	0.01
3 X 2.5	7/0.67	9.4	12.0	228	0.01
3 X 4.0	1/2.25	10.0	12.5	279	0.0085
3 X 4.0	7/0.85	10.5	13.5	298	0.0077

聚氯乙稀絕緣護套控制電纜

PVC INSULATED PVC SHEATHED CONTROL CABLES

截面 Cross-sectional Area (mm ²)	導體結構 No.& diameter of wire (N/mm)	參考外徑 Reference overall diameter (mm)		參考重量 Reference weight (kg/km)	最小絕緣電阻 Insulation Resistance (MΩ/km) 70°C Min
		下限 Lower limit	上限 Upper limit		
3 X 6.0	1/2.76	11.5	14.0	375	0.007
3 X 6.0	7/1.04	12.0	15.0	398	0.0065
3 X 10	7/1.35	14.5	18.5	512	0.0065
4 X 0.75	1/0.97	7.2	9.0	119	0.012
4 X 0.75	7/0.37	7.4	9.6	128	0.014
4 X 1.0	1/1.13	7.6	9.4	135	0.011
4 X 1.0	7/0.43	7.8	10.0	145	0.013
4 X 1.5	1/1.38	8.6	10.5	187	0.011
4 X 1.5	7/0.52	9.0	11.5	200	0.01
4 X 2.5	1/1.78	10.0	12.0	257	0.01
4 X 2.5	7/0.67	10.0	13.0	274	0.01
4 X 4.0	1/2.25	11.5	14.0	353	0.0085
4 X 4.0	7/0.85	12.0	15.0	376	0.0077
4 X 6.0	1/2.76	12.5	15.0	455	0.007
4 X 6.0	7/1.04	13.0	16.5	487	0.0065
4 X 10	7/1.35	16.0	20.0	749	0.0065
5 X 0.75	1/0.97	7.8	9.6	140	0.012
5 X 0.75	7/0.37	8.0	10.5	150	0.014
5 X 1.0	1/1.13	8.2	10.0	166	0.011
5 X 1.0	7/0.43	8.4	11.0	178	0.013
5 X 1.5	1/1.38	9.4	11.5	219	0.011
5 X 1.5	7/0.52	9.8	12.5	234	0.01
5 X 2.5	1/1.78	11.5	14.0	304	0.01
5 X 2.5	7/0.67	11.5	14.5	324	0.01

聚氯乙稀絕緣護套控制電纜

PVC INSULATED PVC SHEATHED CONTROL CABLES

截面 Cross-sectional Area (mm ²)	導體結構 No.& diameter of wire (N/mm)	參考外徑 Reference overall diameter (mm)		參考重量 Reference weight (kg/km)	最小絕緣電阻 Insulation Resistance (MΩ/km) 70°C Min
		下限 Lower limit	上限 Upper limit		
5 X 4.0	1/2.25	12.5	15.0	419	0.0085
5 X 4.0	7/0.85	13.0	16.5	447	0.0077
5 X 6.0	1/2.76	14.0	16.5	549	0.007
5 X 6.0	7/1.04	14.5	18.0	583	0.0065
5 X 10	7/1.35	18.0	22.5	915	0.0065
7 X 0.75	1/0.97	8.4	10.5	140	0.012
7 X 0.75	7/0.37	8.8	11.0	150	0.014
7 X 1.0	1/1.13	9.0	11.0	160	0.011
7 X 1.0	7/0.43	9.2	11.5	172	0.013
7 X 1.5	1/1.38	10.0	12.5	219	0.011
7 X 1.5	7/0.52	10.5	13.5	236	0.01
7 X 2.5	1/1.78	12.5	15.0	327	0.01
7 X 2.5	7/0.67	12.5	16.0	352	0.01
7 X 4.0	1/2.25	13.5	16.5	529	0.0085
7 X 4.0	7/0.85	14.0	17.5	563	0.0077
7 X 6.0	1/2.76	15.0	18.0	690	0.007
7 X 6.0	7/1.04	15.5	19.5	735	0.0065
7 X 10	7/1.35	20.0	24.0	1169	0.0065
8 X 0.75	1/0.97	9.4	11.5	160	0.012
8 X 0.75	7/0.37	9.6	12.0	172	0.014
8 X 1.0	1/1.13	10.0	12.0	184	0.011
8 X 1.0	7/0.43	10.0	13.0	197	0.013
8 X 1.5	1/1.38	12.0	14.5	258	0.011
8 X 1.5	7/0.52	12.5	15.5	278	0.01

聚氯乙稀絕緣護套控制電纜

PVC INSULATED PVC SHEATHED CONTROL CABLES

截面 Cross-sectional Area (mm ²)	導體結構 No. & diameter of wire (N/mm)	參考外徑 Reference overall diameter (mm)		參考重量 Reference weight (kg/km)	最小絕緣電阻 Insulation Resistancee (MΩ/km) 70°C Min
		下限 Lower limit	上限 Upper limit		
8 X 2.5	1/1.78	14.0	16.5	377	0.01
8 X 2.5	7/0.67	14.0	17.5	406	0.01
8 X 4.0	1/2.25	15.5	18.0	605	0.0085
8 X 4.0	7/0.85	16.0	19.5	645	0.0077
8 X 6.0	1/2.76	17.5	20.0	807	0.007
8 X 6.0	7/1.04	18.0	22.0	857	0.0065
8 X 10	7/1.35	22.5	27.0	1343	0.0065
10 X 0.75	1/0.97	10.5	12.5	195	0.012
10 X 0.75	7/0.37	10.5	13.5	209	0.014
10 X 1.0	1/1.13	11.5	14.0	224	0.011
10 X 1.0	7/0.43	12.0	15.0	240	0.013
10 X 1.5	1/1.38	13.5	16.0	316	0.011
10 X 1.5	7/0.52	14.0	17.0	341	0.01
10 X 2.5	1/1.78	15.5	18.5	464	0.01
10 X 2.5	7/0.67	16.0	19.5	500	0.01
10 X 4.0	1/2.25	18.0	20.5	740	0.0085
10 X 4.0	7/0.85	18.5	22.5	809	0.0077
10 X 6.0	1/2.76	19.5	22.5	990	0.007
10 X 6.0	7/1.04	20.5	25.0	1052	0.0065
10 X 10	7/1.35	25.5	30.5	1655	0.0065
12 X 0.75	1/0.97	11.5	13.5	223	0.012
12 X 0.75	7/0.37	11.5	14.5	272	0.014
12 X 1.0	1/1.13	12.0	14.5	258	0.011
12 X 1.0	7/0.43	12.5	15.5	277	0.013
12 X 1.5	1/1.38	14.0	16.5	357	0.011

聚氯乙稀絕緣護套控制電纜

PVC INSULATED PVC SHEATHED CONTROL CABLES

截面 Cross-sectional Area (mm ²)	導體結構 No.& diameter of wire (N/mm)	參考外徑 Reference overall diameter (mm)		參考重量 Reference weight (kg/km)	最小絕緣電阻 Insulation Resistancee (MΩ/km) 70°C Min
		下限 Lower limit	上限 Upper limit		
12 X 1.5	7/0.52	14.0	17.5	382	0.01
12 X 2.5	1/1.78	16.0	19.0	528	0.01
12 X 2.5	7/0.67	16.5	20.5	569	0.01
12 X 4.0	1/2.25	18.5	21.5	858	0.0085
12 X 4.0	7/0.85	19.0	23.0	912	0.0077
12 X 6.0	1/2.76	20.5	23.5	1127	0.007
12 X 6.0	7/1.04	21.0	26.0	1196	0.0065
14 X 0.75	1/0.97	12.0	14.5	250	0.012
14 X 0.75	7/0.37	12.0	15.0	268	0.014
14 X 1.0	1/1.13	12.5	15.0	290	0.011
14 X 1.0	7/0.43	13.0	16.0	311	0.013
14 X 1.5	1/1.38	14.5	17.0	404	0.011
14 X 1.5	7/0.52	15.0	18.5	435	0.01
14 X 2.5	1/1.78	17.0	19.5	601	0.01
14 X 2.5	7/0.67	17.5	21.5	647	0.01
14 X 4.0	1/2.25	19.5	22.5	976	0.0085
14 X 4.0	7/0.85	20.0	24.5	1031	0.0077
14 X 6.0	1/2.76	21.5	24.5	1280	0.007
14 X 6.0	7/1.04	22.5	27.0	1357	0.0065
16 X 0.75	1/0.97	12.5	15.0	279	0.012
16 X 0.75	7/0.37	13.0	16.0	299	0.014
16 X 1.0	1/1.13	13.0	15.5	325	0.011
16 X 1.0	7/0.43	13.5	17.0	348	0.013
16 X 1.5	1/1.38	15.0	18.0	454	0.011
16 X 1.5	7/0.52	15.5	19.5	488	0.01

聚氯乙烯絕緣護套控制電纜

PVC INSULATED PVC SHEATHED CONTROL CABLES

截面 Cross-sectional Area (mm ²)	導體結構 No.& diameter of wire (N/mm)	參考外徑 Reference overall diameter (mm)		參考重量 Reference weight (kg/km)	最小絕緣電阻 Insulation Resistancee (MΩ/km) 70°C Min
		下限 Lower limit	上限 Upper limit		
16 X 2.5	1/1.78	18.0	21.0	694	0.01
16 X 2.5	7/0.67	19.0	23.0	747	0.01
19 X 0.75	1/0.97	13.0	15.5	316	0.012
19 X 0.75	7/0.37	13.5	16.5	339	0.014
19 X 1.0	1/1.13	14.0	16.5	369	0.011
19 X 1.0	7/0.43	14.5	17.5	395	0.013
19 X 1.5	1/1.38	16.0	19.0	519	0.011
19 X 1.5	7/0.52	16.5	20.5	556	0.01
19 X 2.5	1/1.78	19.0	22.0	793	0.01
19 X 2.5	7/0.67	20.0	24.0	854	0.01
24 X 0.75	1/0.97	15.0	18.0	394	0.012
24 X 0.75	7/0.37	15.5	19.0	422	0.014
24 X 1.0	1/1.13	16.0	19.0	461	0.011
24 X 1.0	7/0.43	16.5	20.5	494	0.013
24 X 1.5	1/1.38	19.0	22.0	665	0.011
24 X 1.5	7/0.52	20.0	24.0	716	0.01
24 X 2.5	1/1.78	22.5	25.5	995	0.01
24 X 2.5	7/0.67	23.0	28.0	1072	0.01
27 X 0.75	1/0.97	15.5	18.0	428	0.012
27 X 0.75	7/0.37	16.0	19.5	518	0.014
27 X 1.0	1/1.13	16.5	19.0	504	0.011
27 X 1.0	7/0.43	17.0	20.5	540	0.013
27 X 1.5	1/1.38	19.5	22.5	727	0.011
27 X 1.5	7/0.52	20.0	24.5	778	0.01

聚氯乙稀絕緣護套控制電纜

PVC INSULATED PVC SHEATHED CONTROL CABLES

截面 Cross-sectional Area (mm ²)	導體結構 No.& diameter of wire (N/mm)	參考外徑 Reference overall diameter (mm)		參考重量 Reference weight (kg/km)	最小絕緣電阻 Insulation Resistancee (MΩ/km) 70°C Min
		下限 Lower limit	上限 Upper limit		
27 X 2.5	1/1.78	23.0	26.0	1093	0.01
27 X 2.5	7/0.67	23.5	28.5	1177	0.01
30 X 0.75	1/0.97	16.0	19.0	466	0.012
30 X 0.75	7/0.37	16.5	20.0	499	0.014
30 X 1.0	1/1.13	17.5	20.5	566	0.011
30 X 1.0	7/0.43	18.0	22.0	606	0.013
30 X 1.5	1/1.38	20.0	23.0	795	0.011
30 X 1.5	7/0.52	21.0	25.0	856	0.01
30 X 2.5	1/1.78	24.0	27.0	1199	0.01
30 X 2.5	7/0.67	24.5	29.5	1291	0.01
37 X 0.75	1/0.97	17.5	20.5	572	0.012
37 X 0.75	7/0.37	18.0	22.0	613	0.014
37 X 1.0	1/1.13	18.5	21.5	674	0.011
37 X 1.0	7/0.43	19.5	23.5	722	0.013
37 X 1.5	1/1.38	21.5	25.0	950	0.011
37 X 1.5	7/0.52	22.5	27.0	1022	0.01
37 X 2.5	1/1.78	25.5	29.0	1440	0.01
37 X 2.5	7/0.67	26.5	31.5	1551	0.01
44 X 0.75	1/0.97	19.5	23.0	674	0.012
44 X 0.75	7/0.37	20.5	24.5	722	0.014
44 X 1.0	1/1.13	21.0	24.0	795	0.011
44 X 1.0	7/0.43	21.5	26.0	851	0.013
44 X 1.5	1/1.38	24.5	28.0	1123	0.011
44 X 1.5	7/0.52	25.5	30.5	1209	0.01

聚氯乙稀絕緣護套控制電纜

PVC INSULATED PVC SHEATHED CONTROL CABLES

截面 Cross-sectional Area (mm ²)	導體結構 No.& diameter of wire (N/mm)	參考外徑 Reference overall diameter (mm)		參考重量 Reference weight (kg/km)	最小絕緣電阻 Insulation Resistancee (MΩ/km) 70°C Min
		下限 Lower limit	上限 Upper limit		
44 X 2.5	1/1.78	29.5	33.5	1748	0.01
44 X 2.5	7/0.67	30.5	36.0	1882	0.01
48 X 0.75	1/0.97	20.0	23.0	716	0.012
48 X 0.75	7/0.37	20.5	25.5	767	0.014
52 X 1.0	1/1.13	22.0	25.0	847	0.011
52 X 1.0	7/0.43	22.5	27.0	907	0.013
52 X 1.5	1/1.38	25.5	29.0	1187	0.011
52 X 1.5	7/0.52	26.5	31.5	1289	0.01
52 X 2.5	1/1.78	31.0	35.0	1866	0.01
52 X 2.5	7/0.67	32.0	38.0	2010	0.01
61 X 0.75	1/0.97	22.0	25.0	882	0.012
61 X 0.75	7/0.37	22.5	27.0	944	0.014
61 X 1.0	1/1.13	23.0	26.5	1047	0.011
61 X 1.0	7/0.43	24.0	28.5	1121	0.013
61 X 1.5	1/1.38	27.5	31.5	1526	0.011
61 X 1.5	7/0.52	28.5	34.0	1642	0.01
61 X 2.5	1/1.78	33.0	37.5	2354	0.01
61 X 2.5	7/0.67	34.0	40.5	2535	0.01