


聚氯乙烯絕緣單芯軟電纜 (控制引線)

PVC INSULATED NON-SHEATHED CABLES

(CONTROL CABLE)

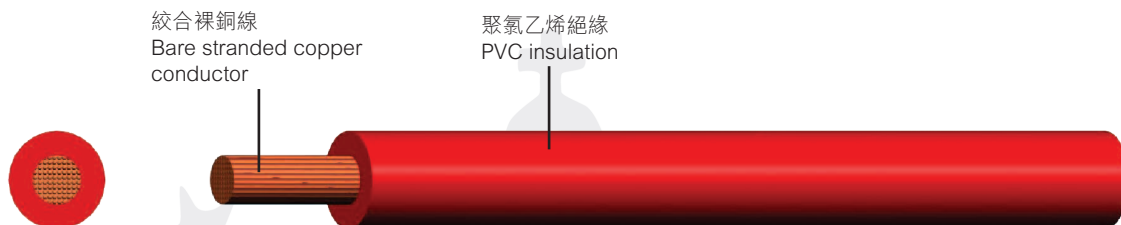

ROYAL HORSE 60227IEC06 (RV) 300/500V N.NNmm² PVC CABLE GB/T5023 KEMA-KEUR CCC A007306
or
ROYAL HORSE 60227IEC02 (RV) 450/750V N.NNmm² PVC CABLE GB/T5023 KEMA-KEUR CCC A007306

說明

- 工作溫度: 70 °C
- 額定電壓: 300/500V、450/750V
- 標準: GB/T5023、IEC60227
- 型號: 227IEC06 & 02 (RV)
- 導體使用絞合裸銅線
- 阻燃聚氯乙烯絕緣

DESCRIPTION

- Rated temperature: 70°C
- Rated voltage: 300/500V, 450/750V
- Reference standard: GB/T5023, IEC60227
- Model: 227IEC06 & 02 (RV)
- Stranded copper conductor
- Flame retardant colour-coded PVC insulation

應用

- 中輕型移動電器、儀器儀表、家用電器、動力照明等使用時要求柔軟的場合

APPLICATION

- For light or medium size home appliances, instrument & meters, and power-driven lighting

聚氯乙稀絕緣單芯軟電纜 (控制引線)

PVC INSULATED NON-SHEATHED CABLES (CONTROL CABLE)

截面 Cross-sectional Area (mm ²)	導體結構 No. & diameter of wire (N/mm)	參考外徑 Reference overall diameter (mm)	參考重量 Reference weight (kg/km)	最小絕緣電阻 Insulation Resistance (MΩ · km) 70°C Min
60227IEC06 (RV) 300/500V				
0.5	17/0.19	2.24	9.8	0.013
0.75	26/0.19	2.45	12.8	0.011
1.0	35/0.19	2.65	15.8	0.010
60227IEC02 (RV) 450/750V				
1.5	30/0.25	3.32	25.1	0.010
2.5	50/0.25	3.80	35.2	0.009
4	56/0.3	4.40	52.0	0.007
6	84/0.3	5.30	76.6	0.006
10	80/0.4	6.50	123.2	0.0056
16	126/0.4	8.70	197.3	0.0046
25	196/0.4	10.40	296.7	0.0044
35	273/0.4	12.00	401.3	0.0038
50	392/0.4	14.00	560	0.0037
70	555/0.4	16.20	767	0.0032
95	755/0.4	18.10	1021	0.0032
120	953/0.4	19.80	1265	0.0029
150	1192/0.4	22.00	1584	0.0029
185	1470/0.4	24.70	1942	0.0029
240	1908/0.4	27.40	2494	0.0028