


特軟型聚氯乙烯絕緣護套軟電線 (充實型 / 棉紗型) PVC INSULATED PVC SHEATHED FLEXIBLE CABLES (FILLED)

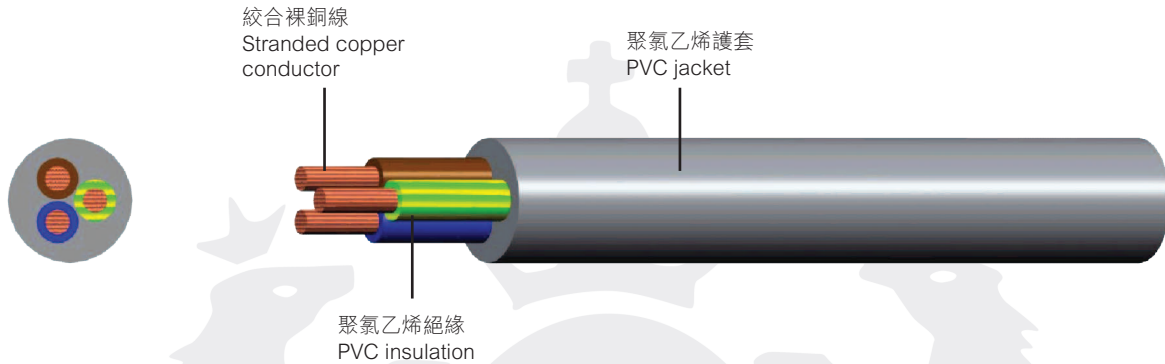

ROYAL HORSE	60227IEC52	ROUND	(H03VV-H)	N x N.Nmm ²	300/300V	PVC CABLE
			or			
ROYAL HORSE	60227IEC53	ROUND	(H05VV-F)	N x N.Nmm ²	300/500V	PVC CABLE
			or			
ROYAL HORSE	60227IEC52	FILLED WITH COTTON THREAD	(H03VV-H)	N x N.Nmm ²	300/300V	P.V.C. CABLE
			or			
ROYAL HORSE	60227IEC53	FILLED WITH COTTON THREAD	(H05VV-F)	N x N.Nmm ²	300/500V	P.V.C. CABLE

說明

- 工作溫度: 70 °C
- 額定電壓: 300/300V、300/500V
- 標準: GB/T5023、IEC60227
- 型號: 227IEC52 & 53 (RVV), H03VV-H/ H05VV-F
- 導體使用絞合裸銅線
- 聚氯乙烯或阻燃聚氯乙烯絕緣
- 聚氯乙烯、阻燃聚氯乙烯或棉紗填充
- 聚氯乙烯或阻燃聚氯乙烯護套

應用

- 中輕型移動電器、儀器儀表、家用電器、動力照明等使用時要求柔軟の場合

DESCRIPTION

- Rated temperature: 70°C
- Rated voltage: 300/300V, 300/500V
- Reference standard: GB/T5023, IEC60227
- Model: 227IEC52 & 53 (RVV), H03VV-H/ H05VV-F
- Stranded copper conductor
- PVC or flame retardant colour-coded PVC insulation
- PVC, flame retardant PVC or cotton thread filler
- PVC or flame retardant PVC jacket

APPLICATION

- For light or medium size home appliances, instrument & meters, and power-driven lighting

特軟型聚氯乙烯絕緣護套軟電線 (充實型 / 棉紗型)

PVC INSULATED PVC SHEATHED FLEXIBLE CABLES

(FILLED)

截面 Cross-sectional Area (mm ²)	導體結構 No. & diameter of wire (N/mm)	平均外徑上限 Average overall diameter (mm)		參考重量 Reference weight (kg/km)		最小絕緣電阻 Insulation Resistance (MΩ · km) 70°C Min
		充實型 PVC	棉紗型 Cotton Thread	充實型 PVC	棉紗型 Cotton Thread	
60227IEC52 (RVV)						
2 x 0.5	44/0.12	5.9	5.9	59	50	0.012
2 x 0.75	70/0.12	6.3	6.3	73	61	0.010
3 x 0.5	44/0.12	6.3	6.3	74	72	0.012
3 x 0.75	70/0.12	6.7	6.7	96	85	0.010
60227IEC53 (RVV)						
2 x 0.75	70/0.12	7.2	7.2	81	68	0.011
2 x 1.0	100/0.12	7.5	7.5	109	89	0.010
2 x 1.5	162/0.12	8.6	8.6	141	110	0.010
3 x 0.75	70/0.12	7.6	7.6	106	94	0.011
3 x 1.0	100/0.12	8.0	8.0	128	117	0.010
3 x 1.5	162/0.12	9.4	9.4	170	148	0.010
4 x 0.75	70/0.12	8.3	8.3	125	117	0.011
4 x 1.0	100/0.12	9.0	9.0	154	143	0.010
4 x 1.5	162/0.12	10.5	10.5	228	189	0.010

ROYAL HORSE