


輕型或普通型聚氯乙烯絕緣護套軟電線

LIGHT OR ORDINARY DUTY PVC INSULATED PVC SHEATHED FLEXIBLE CABLES

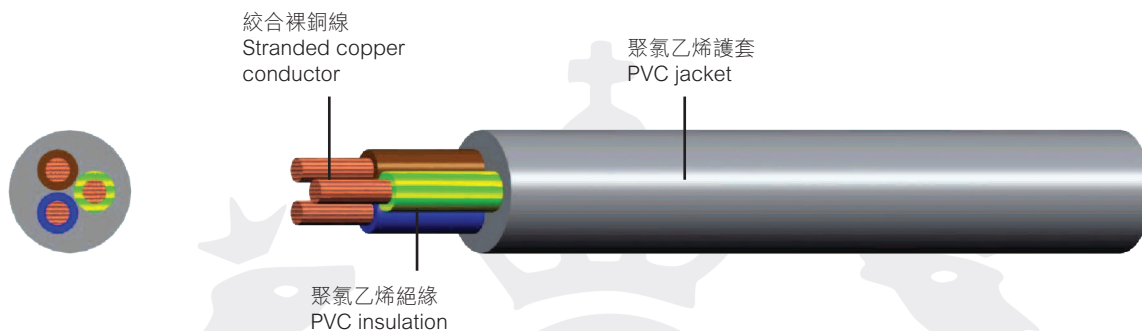

ROYAL HORSE 60227IEC52 ROUND (H03VV-F) N x N.Nmm² 300/300V PVC CABLE
 or
 ROYAL HORSE 60227IEC53 ROUND (H05VV-F) N x N.Nmm² 300/500V PVC CABLE

說明

- 工作溫度: 70 °C
- 額定電壓: 300/300V、300/500V
- 標準: GB/T5023、IEC60227
- 型號: 227IEC52 & 53 (RVV), H03VV-F/ H05VV-F
- 導體使用絞合裸銅線
- 聚氯乙烯或阻燃聚氯乙烯絕緣
- 聚氯乙烯或阻燃聚氯乙烯護套

應用

- 中輕型移動電器、儀器儀表、家用電器、動力照明等使用時要求柔軟的場合

DESCRIPTION

- Rated temperature: 70°C
- Rated voltage: 300/300V, 300/500V
- Reference standard: GB/T5023, IEC60227
- Model: 227IEC52 & 53 (RVV), H03VV-F/ H05VV-F
- Stranded copper conductor
- PVC or flame retardant colour-coded PVC insulation
- PVC or flame retardant PVC jacket

APPLICATION

- For light or medium size home appliances, instrument & meters, and power-driven lighting

輕型或普通型聚氯乙烯絕緣護套軟電線

LIGHT OR ORDINARY DUTY PVC INSULATED PVC SHEATHED FLEXIBLE CABLES

截面 Cross-sectional Area (mm ²)	導體結構 No. & diameter of wire (N/mm)	參考外徑 Reference overall diameter (mm)	參考重量 Reference weight (kg/km)	最小絕緣電阻 Insulation Resistance (MΩ · km) 70°C Min
60227IEC52 (RVV)				
2 x 0.5	17/0.19	5.7	46	0.012
2 x 0.75	26/0.19	6.10	55	0.010
3 x 0.5	17/0.19	6.20	57	0.012
3 x 0.75	26/0.19	6.65	66	0.010
60227IEC53 (RVV)				
2 x 0.75	26/0.19	6.7	59	0.011
2 x 1.0	35/0.19	7.1	68	0.010
2 x 1.5	30/0.25	8.1	92	0.010
2 x 2.5	50/0.25	10.0	134	0.009
2 x 4.0	80/0.25	10.8	191	0.007
3 x 0.75	26/0.19	7.1	70	0.011
3 x 1.0	35/0.19	7.6	82	0.010
3 x 1.5	30/0.25	8.9	110	0.010
3 x 2.5	50/0.25	10.6	168	0.009
3 x 4.0	80/0.25	11.7	240	0.007
4 x 0.75	26/0.19	8.0	84	0.011
4 x 1.0	35/0.19	8.5	99	0.010
4 x 1.5	30/0.25	9.9	139	0.010
4 x 2.5	50/0.25	11.8	209	0.009
4 x 4.0	80/0.25	12.8	299	0.007
5 x 0.75	26/0.19	8.8	98	0.011
5 x 1.0	35/0.19	9.6	130	0.010
5 x 1.5	30/0.25	11.0	175	0.010
5 x 2.5	50/0.25	13.1	259	0.009
5 x 4.0	80/0.25	14.1	369	0.007