


## 交聯聚乙烯絕緣、無鎧裝、聚氯乙烯護套電力電纜 (3+2芯) XLPE INSULATED, UN-ARMoured, PVC SHEATHED POWER CABLES (3+2 CORES)

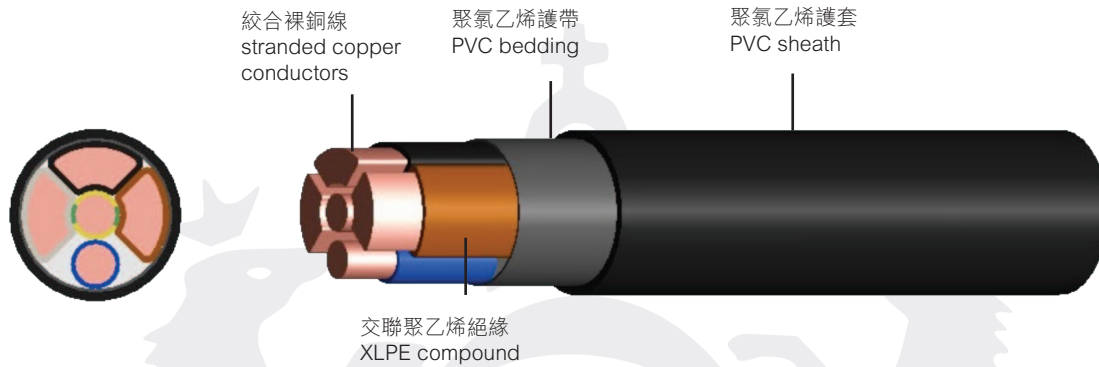

ROYAL HORSE 0.6/1KV 3xNN mm<sup>2</sup> + 2xNN mm<sup>2</sup> XLPE/PVC CABLE GB/T12706 IEC60502-1

### 說明

- 工作溫度: 90 °C
- 額定電壓: 600/1000V
- 標準: GB/T12706、IEC60502
- 型號: YJV
- 導體使用絞合裸銅線
- 阻燃聚氯乙烯絕緣
- 阻燃無紡布/聚氯乙烯內墊層
- 阻燃聚氯乙烯護套

### 應用

- 適用於固定敷設的輸配電系統，  
隧道及管道等場合
- 電纜不能承受壓力和機械外力

### DESCRIPTION

- Rated Temperature: 90°C
- Rated Voltage: 600/1000V
- Reference Standard:  
GB/T12706, IEC60502
- Model: YJV
- Shaped and circular stranded  
copper conductors
- Flame retardant insulated with  
PVC compound
- PVC bedded
- Flame retardant PVC sheathed  
overall


### APPLICATION

- For fixed installation of the  
transmission and distribution  
systems, tunnels and pipelines  
and other occasions
- For situation not suppose to bear  
external mechanical force

**交聯聚乙烯絕緣、無鎧裝、聚氯乙烯護套電力電纜 (3+2芯)**  
**XLPE INSULATED, UN-ARMoured, PVC SHEATHED**  
**POWER CABLES (3+2 CORES)**

圓芯 Circular Conductor

截面 Cross-sectional Area (mm <sup>2</sup> )	導體結構 No.& diameter of wire (N/mm)	平均外徑 Average overall diameter (mm)	參考重量 Reference weight (kg/km)
3x1.5+2x1.0	1/1.38, 1/1.13	13.6	248
3x2.5+2x1.5	1/1.76, 1/1.38	14.7	308
3x4.0+2x2.5	7/0.85, 7/0.67	16.8	460
3x6.0+2x4.0	7/1.04, 7/0.85	18.1	541
3x10+2x6.0	7/1.35, 7/1.04	20.3	753
3x16+2x6.0	7/1.70, 7/1.04	21.9	962
3x16+2x10	7/1.70, 7/1.35	23.0	1072
3x25+2x10	7/2.14, 7/1.35	25.4	1414
3x25+2x16	7/2.14, 7/1.70	26.5	1553
3x35+2x10	19/1.53, 7/1.35	27.5	1750
3x35+2x16	19/1.53, 7/1.70	28.8	1905

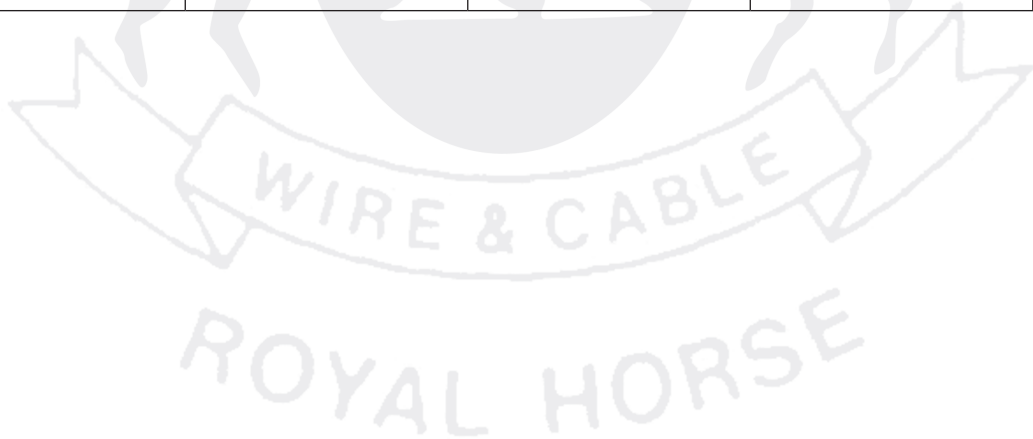

**交聯聚乙烯絕緣、無鎧裝、聚氯乙烯護套電力電纜 (3+2芯)**  
**XLPE INSULATED, UN-ARMoured, PVC SHEATHED**  
**POWER CABLES (3+2 CORES)**

瓦型+圓型 Arc and Circular Conductor

截面 Cross-sectional Area (mm <sup>2</sup> )	導體結構 No.& diameter of wire (N/mm)	平均外徑 Average overall diameter (mm)	參考重量 Reference weight (kg/km)
3x50+2x16	19/1.83, 7/1.70	27.1	2020
3x50+2x25	19/1.83, 7/2.14	28.5	2198
3x70+2x25	27/1.83, 7/2.14	30.8	2844
3x70+2x35	27/1.83, 19/1.53	32.1	3006
3x95+2x35	37/1.83, 19/1.53	35.0	3804
3x95+2x50	37/1.83, 19/1.78	36.2	4059
3x120+2x35	30/2.32, 19/1.53	38.3	4617
3x120+2x70	30/2.32, 19/2.14	39.8	5258
3x150+2x50	37/2.32, 19/1.78	42.6	5736
3x150+2x70	37/2.32, 19/2.14	44.2	6091
3x185+2x50	37/2.52, 19/1.78	45.8	6783
3x185+2x95	37/2.52, 19/2.52	49.0	7633
3x240+2x70	48/2.52, 19/2.14	51.6	8803
3x240+2x120	48/2.52, 37/2.03	54.6	9700
3x300+2x95	61/2.52, 19/2.52	58.4	11193
3x300+2x150	61/2.52, 37/2.25	61.4	12104

ROYAL HORSE