


交聯聚乙烯絕緣、鋼絲鎧裝、聚氯乙烯護套電力電纜 (3+2芯) XLPE INSULATED, STEEL WIRE ARMoured, PVC SHEATHED POWER CABLES (3+2 CORES)

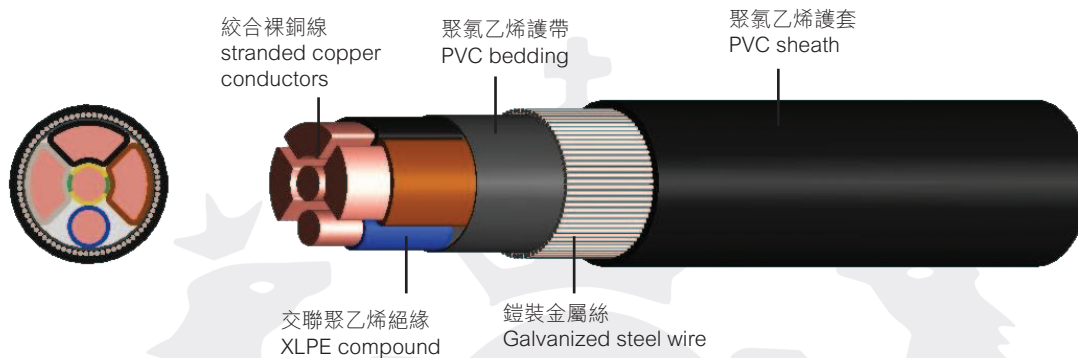

ROYAL HORSE 0.6/1KV 3xNN mm² + 2xNN mm² XLPE/SWA/PVC CABLE GB/T12706 IEC60502-1

說明

- 工作溫度: 90°C
- 額定電壓: 600/1000V
- 標準: GB/T12706、IEC60502
- 型號: YJV₃₂
- 導體使用絞合裸銅線
- 阻燃聚氯乙烯絕緣
- 阻燃無紡布/聚氯乙烯內墊層
- 鎧裝金屬絲
- 阻燃聚氯乙烯護套

應用

- 適用於固定敷設的輸配電系統，隧道及管道等場合
- 能承受機械外力和相當的拉力

DESCRIPTION

- Rated Temperature: 90°C
- Rated Voltage: 600/1000V
- Reference Standard: GB/T12706, IEC60502
- Model: YJV₃₂
- Shaped and circular stranded copper conductors
- Flame retardant insulated with PVC compound
- PVC bedded
- Galvanized steel wire armoured
- Flame retardant PVC sheathed overall

APPLICATION

- For fixed installation of the transmission and distribution systems, tunnels and pipelines and other occasions
- Protection against mechanical aggressions and rodents

交聯聚乙烯絕緣、鋼絲鎧裝、聚氯乙烯護套電力電纜 (3+2芯)
XLPE INSULATED, STEEL WIRE ARMoured, PVC
SHEATHED POWER CABLES (3+2 CORES)

圓芯 Circular Conductor

截面 Cross-sectional Area (mm ²)	導體結構 No.& diameter of wire (N/mm)	平均外徑 Average overall diameter (mm)	參考重量 Reference weight (kg/km)
3x1.5+2x1.0	1/1.38, 1/1.13	16.3	522
3x2.5+2x1.5	1/1.76, 1/1.38	17.1	595
3x4.0+2x2.5	7/0.85, 7/0.67	19.1	754
3x6.0+2x4.0	7/1.04, 7/0.85	20.6	913
3x10+2x6.0	7/1.35, 7/1.04	23.5	1318
3x16+2x6.0	7/1.70, 7/1.04	25.1	1575
3x16+2x10	7/1.70, 7/1.35	26.2	1717
3x25+2x10	7/2.14, 7/1.35	28.8	2149
3x25+2x16	7/2.14, 7/1.70	29.9	2324
3x35+2x10	19/1.53, 7/1.35	30.9	2553
3x35+2x16	19/1.53, 7/1.70	32.2	2751



交聯聚乙烯絕緣、鋼絲鎧裝、聚氯乙烯護套電力電纜 (3+2芯)
XLPE INSULATED, STEEL WIRE ARMoured, PVC
SHEATHED POWER CABLES (3+2 CORES)

瓦型+圓型 Arc and Circular Conductor

截面 Cross-sectional Area (mm ²)	導體結構 No.& diameter of wire (N/mm)	平均外徑 Average overall diameter (mm)	參考重量 Reference weight (kg/km)
3x50+2x16	19/1.83, 7/1.70	31.5	2914
3x50+2x25	19/1.83, 7/2.14	32.7	3115
3x70+2x25	27/1.83, 7/2.14	36.0	4086
3x70+2x35	27/1.83, 19/1.53	37.3	4313
3x95+2x35	37/1.83, 19/1.53	40.2	5241
3x95+2x50	37/1.83, 19/1.78	41.2	5506
3x120+2x35	30/2.32, 19/1.53	43.5	6171
3x120+2x70	30/2.32, 19/2.14	47.9	7338
3x150+2x50	37/2.32, 19/1.78	48.4	7822
3x150+2x70	37/2.32, 19/2.14	50.0	8273
3x185+2x50	37/2.52, 19/1.78	51.6	8871
3x185+2x95	37/2.52, 19/2.52	56.0	10545
3x240+2x70	48/2.52, 19/2.14	58.8	11970
3x240+2x120	48/2.52, 37/2.03	61.7	13066
3x300+2x95	61/2.52, 19/2.52	65.4	14702
3x300+2x150	61/2.52, 37/2.25	68.4	15748

ROYAL HORSE